

# INNOMED


ORTHOPEDIC INSTRUMENTS



DECEMBER  
2024

**Long Bonney Tissue Forceps**

Page 29

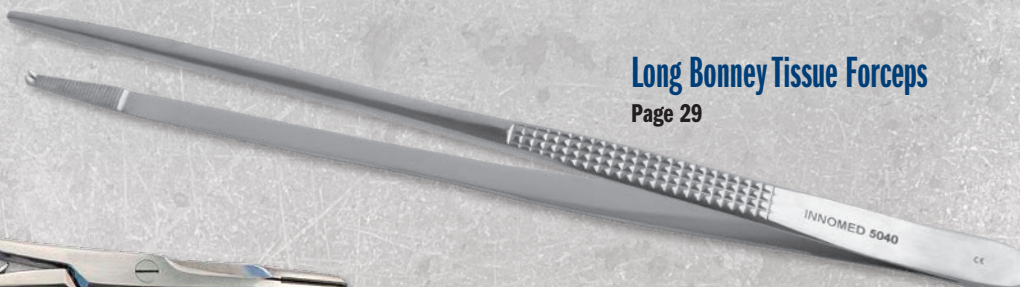

**Rogozinski Locking  
Needle Driver/Scissors**


Page 25



Featuring many **New!** instruments  
inside

**Ortho Mallet-  
Standard 2.25 lbs.  
with Flat Sides**

Page 23

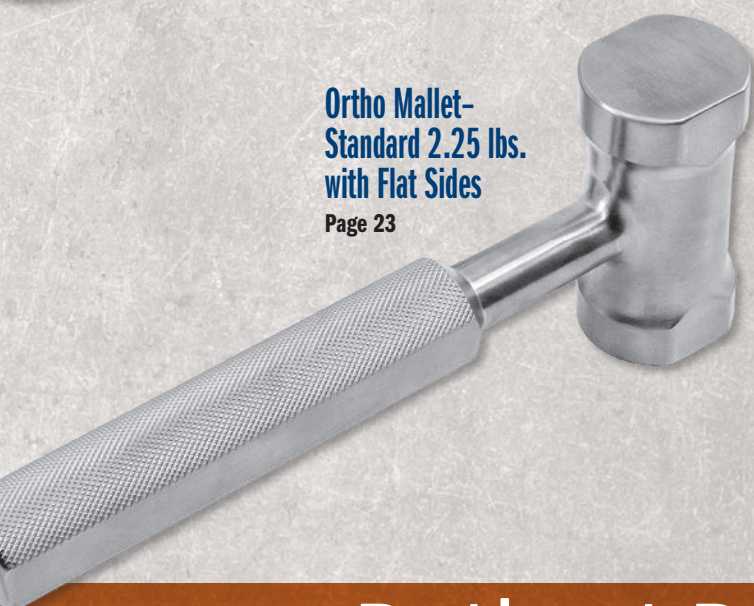

**Chandran Thigh Lift Positioner**

Page 9

## Patient Positioning & General Use Instruments

1.800.548.2362



INNOMED.NET



# Wixson Hip Positioner

Designed by R.L. Wixson, MD

## Provides stable positioning of a patient during hip surgery

The Wixson Hip Positioner is used for stable positioning of a patient during total hip and revision surgery. It is designed to be placed on top of the operating table.

The base plate is rubber-backed to reduce slipping on the table. The uprights can easily be slid in and out of the multiple slots in the plate for desired positioning and locked into position with the locking bolt. The complete upright assembly is radiolucent.

The upright pads and the base plate pad are made of semi-dense foam to help prevent pressure points and are sealed with a washable coating. The coating also helps to lessen the possibility of skin breakdown.

**The hip positioner consists of: One 10" post with double pads, one 6" post with a single pad, one 20" base plate, one base plate pad, two 2" spacers, one 4" knob, and one 6" knob.**

The spacers and longer knobs are supplied for use with larger patients: use one spacer with the 4" knob, or combine the two spacers to use with the 6" knob.

The pad assembly can be adjusted for additional height and width. The upright posts are modular. The complete unit is radiolucent, and all parts are autoclavable except for the washable foam pads.



Baseplate Dimensions: 20" x 11.25" (50,8 cm x 28,6 cm)

### PRODUCT NO'S:

**4050** [Set]  
Consists of: One 10" post assembly with double pads, one 6" post assembly with a single pad, one 20" base plate, one base plate pad, two 2" spacers, one 4" knob, and one 6" knob.

### Pads, Pad Parts, Pad Assemblies & Sets:

**4050-LPD** [Large Pad]  
**4150-P** [Pad Plate] (Small Pad Attaches to this Plate)  
**4150-PA** [Pad Assembly] (Pad Knob, Plate & Pad)  
**4150-PB** [Pad Knob] (Attaches Pad Plate to Post)  
**4150-PD3** [Set of 3 Small Pads]  
**4150-PD12** [Case of 12 Small Pads]  
**4150-V** [Set of 30 Velcro Strips] (For Pad Attachment)

### Posts, Post Parts, Post Assemblies & Sets:


**4150-06** [6" Post (15,2 cm)] (Post Only)  
**4150-06B** [6" Post with Pad Assembly]  
**4050-06C** [6" Post with Pad Assembly and Slider]  
**4150-08** [8" Custom Post (20,3 cm)] (Post Only)  
**4150-09** [9" Custom Post (22,9 cm)] (Post Only)  
**4150-10** [10" Post (25,4 cm)] (Post Only)  
**4150-10B** [10" Post with Pad Assembly]  
**4050-10C** [10" Post with Pad Assembly and Slider]  
**4150-12** [12" Custom Post (30,5 cm)] (Post Only)  
**4150-14** [14" Custom Post (35,6 cm)] (Post Only)  
**4050-PDS** [Full Pad Set] (1 Large & 3 Small Pads)  
**4150-PS** [Post Screw]  
**4050-S** [Slider] (Connects Post to Baseplate)

### Extension Parts, Extension Assemblies & Sets:

**4150-C** [2" Spacer (5,1 cm)]  
**4150-C4** [4" Spacer (10,2 cm)]  
**4150-EK** [4" Knob (10,2 cm)]  
For use with 2" Spacer  
**4150-EK4** [6" Extension Long Knob (15,2 cm)]  
For use with two 2" Spacers or one 4" Spacer  
**4150-EK6** [8" Extension Long Knob (20,3 cm)]  
For use with one 2" Spacer and one 4" Spacer  
**4150-EXT** [2" Extension] (2" Spacer with 4" Knob)  
**4150-EXT4** [4" Extension] (4" Spacer with 6" Knob)  
**4150-EXT6** [6" Extension] (4" and 2" Spacers with 8" Knob)

### Baseplates:

**4050-BP** [20" Standard Baseplate (50,8 cm)]  
(Baseplate Only)  
**4050-BP24** [24" Custom Baseplate (61 cm)]  
(Baseplate Only)

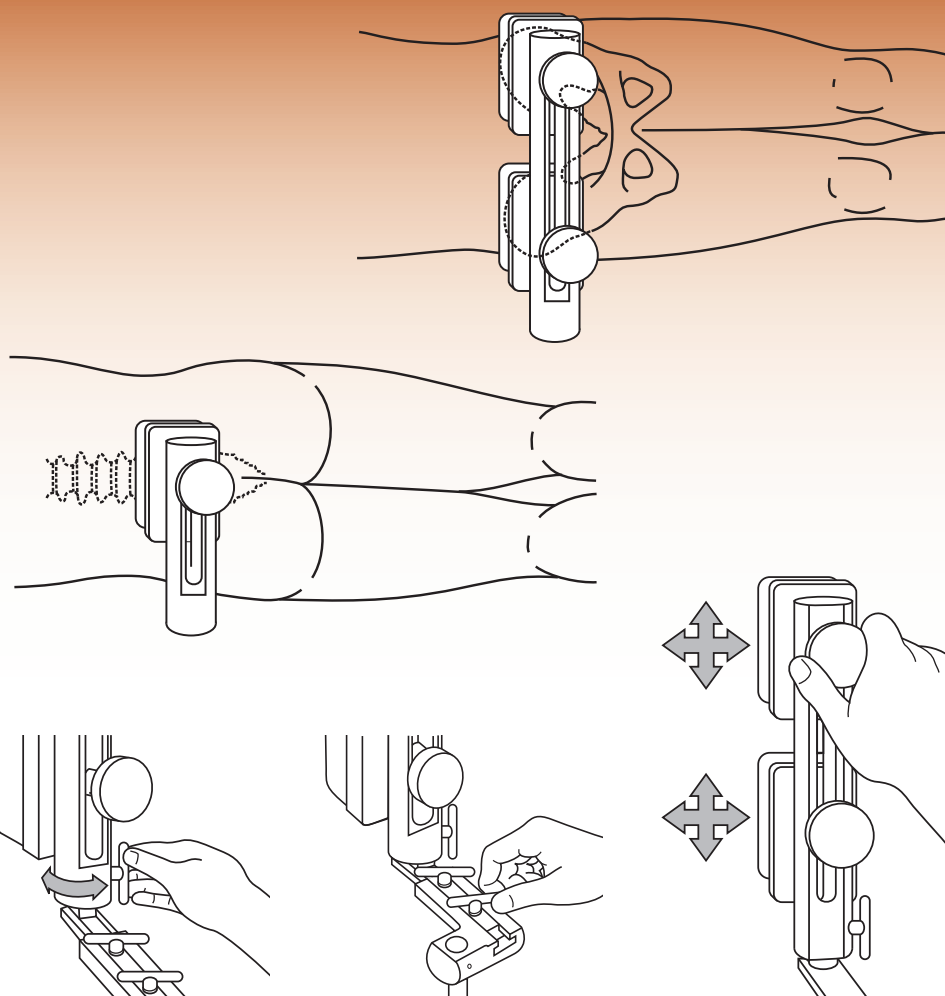

The upright assembly can be rotated and locked in place.

The upright assembly adjusts by a sliding track to accommodate various sized patients. It is locked in the sliding track by tightening one or two locking bolts.

The pads can be adjusted for height and width.



# Stulberg Hip Positioner

Designed by S. David Stulberg, MD

## Provides stable positioning of a patient during hip surgery



The Stulberg Hip Positioner is used for stable positioning of a patient during total hip and revision surgery. It is designed to attach directly to the operating table utilizing the existing table adapters.

The upright pads are made of semi-dense foam to help prevent pressure points and are sealed with a washable coating. The coating also helps to lessen the possibility of skin breakdown.

**The hip positioner consists of: One 10" post assembly with double pads and one 6" post assembly with a single pad, two 2" spacers, one 4" knob, one 6" knob, and two table attachments.**

The spacers and longer knobs are supplied for use with larger patients: use one spacer with the 4" knob, or combine the two spacers to use with the 6" knob.

The pad assembly can be adjusted for additional height and width. The upright posts are modular. The complete unit is radiolucent, and all parts are autoclavable except for the washable foam pads and storage case.

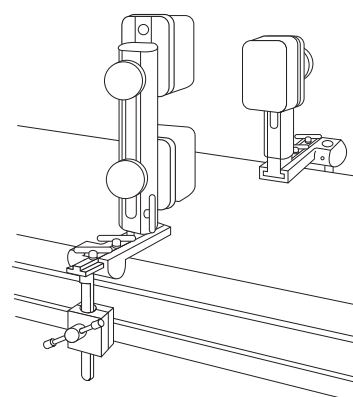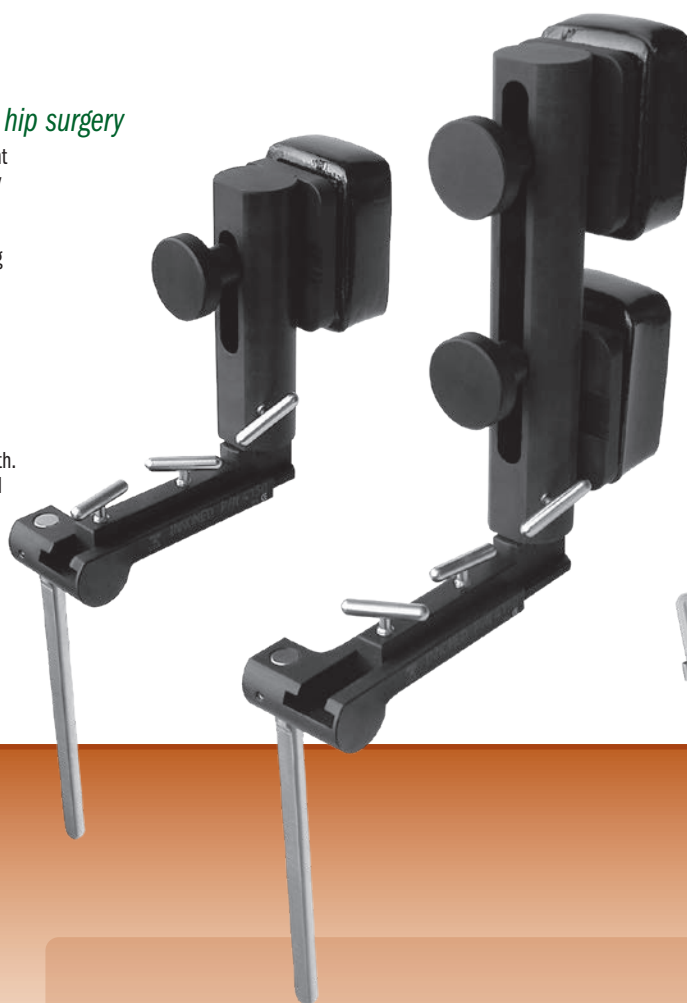

Storage Case Included

### PRODUCT NO'S:

**4150-00** [Set]  
Consists of: Case, one 10" post assembly with double pads, one 6" post assembly with a single pad, two 2" spacers, one 4" knob, one 6" knob, and two table attachments.

### Pads, Pad Parts, Pad Assemblies & Sets:

**4150-P** [Pad Plate] (Small Pad Attaches to this Plate)  
**4150-PA** [Pad Assembly] (Pad Knob, Plate & Pad)  
**4150-PB** [Pad Knob] (Attaches Pad Plate to Post)  
**4150-PD3** [Set of 3 Small Pads]  
**4150-PD12** [Case of 12 Small Pads]  
**4150-V** [Set of 30 Velcro Strips] (For Pad Attachment)

### Posts, Post Parts, Post Assemblies & Sets:

**4150-06** [6" Post (15,2 cm)] (Post Only)  
**4150-06B** [6" Post with Pad Assembly]  
**4150-06C** [6" Post with Pad Assembly and Slider]  
**4150-06D** [6" Post with Pad Assembly, Slider & Table Attachment]  
**4150-08** [8" Custom Post (20,3 cm)] (Post Only)  
**4150-09** [9" Custom Post (22,9 cm)] (Post Only)  
**4150-10** [10" Post (25,4 cm)] (Post Only)  
**4150-10B** [10" Post with Pad Assembly]  
**4150-10C** [10" Post with Pad Assembly and Slider]  
**4150-10D** [10" Post with Pad Assembly, Slider & Table Attachment]  
**4150-12** [12" Custom Post (30,5 cm)] (Post Only)  
**4150-14** [14" Custom Post (35,6 cm)] (Post Only)  
**4150-PS** [Post Screw]  
**4150-S** [Slider] (Connects Post to Table Attachment)  
**4150-TA** [Table Attachment]

### Extension Parts, Extension Assemblies & Sets:


**4150-C** [2" Spacer (5,1 cm)]  
**4150-C4** [4" Spacer (10,2 cm)]  
**4150-EK** [4" Knob (10,2 cm)]  
For use with 2" Spacer  
**4150-EK4** [6" Extension Long Knob (15,2 cm)]  
For use with two 2" Spacers or one 4" Spacer  
**4150-EK6** [8" Extension Long Knob (20,3 cm)]  
For use with one 2" Spacer and one 4" Spacer  
**4150-EXT** [2" Extension (5,1 cm)]  
(2" Spacer with 4" Knob)  
**4150-EXT4** [4" Extension (10,2 cm)]  
(4" Spacer with 6" Knob)  
**4150-EXT6** [6" Extension (15,2 cm)]  
(4" and 2" Spacers with 8" Knob)

### Other Parts:

**9002** [Storage Case]

## Optional Hip Positioner Parts:




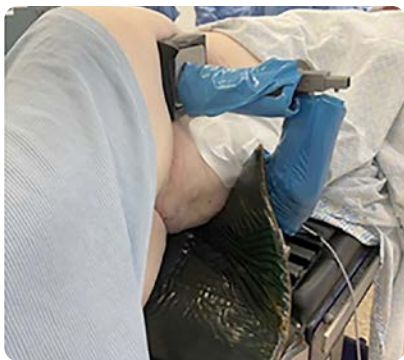


## Belfast Sagittal Plane Positioner

Designed by David Beverland, FRCS

*A sturdy and stable patient support system for posterior approach total hip arthroplasty in the lateral decubitus position*

- ▶ Does not attach to the table, making it compatible with all OR tables
- ▶ Very secure and easy to tighten
- ▶ Accommodates the very obese patient

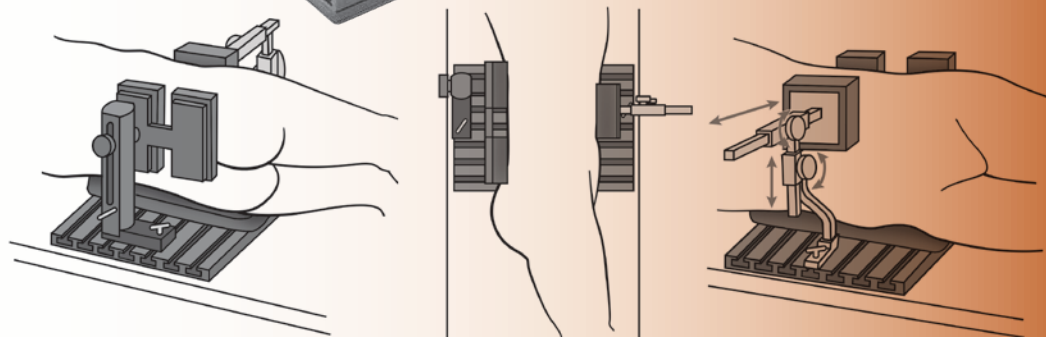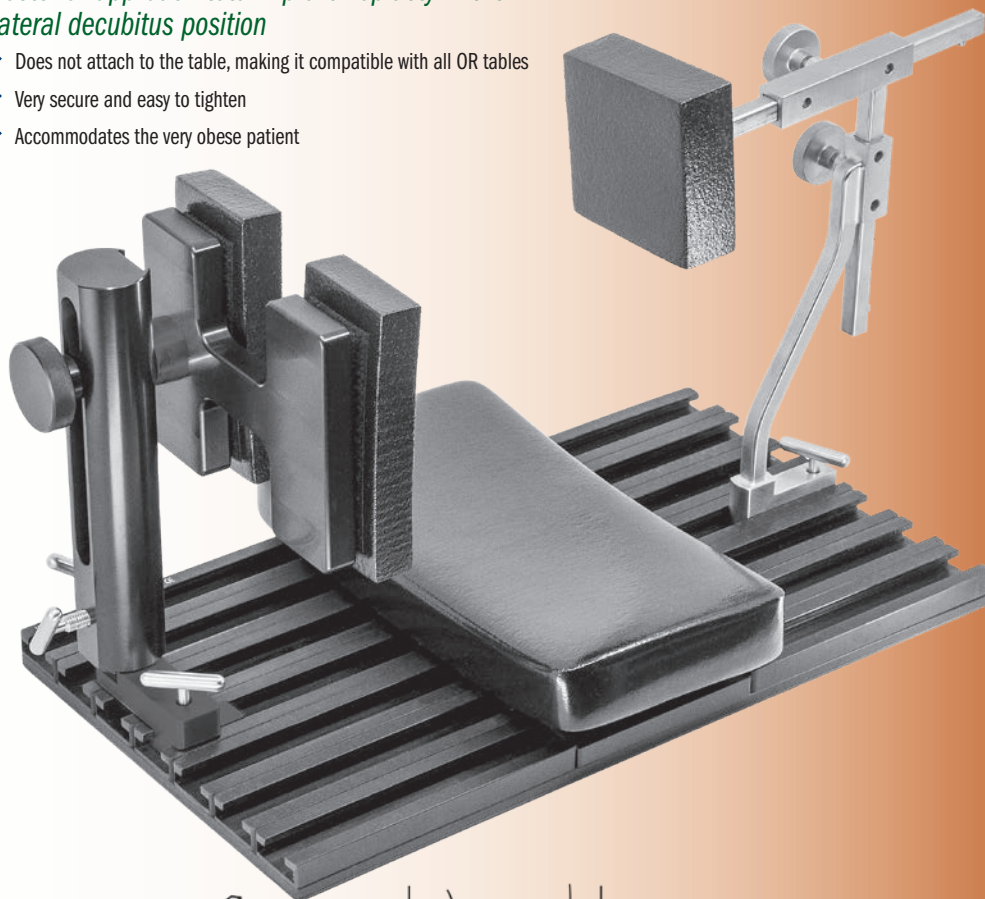

- ▶ Anterior ASIS support unit allows both height and depth adjustment, eliminating the need to adjust the baseplate locking mechanism once secured. The depth adjustment allows extension of up to 150 mm beyond the support base, providing space to avoid the abdominal apron.
- ▶ Posterior support unit offers both Sacral and Iliac Crest support, connected together as one unit, and provides both height and rotation adjustments, as well as a hinged pivot where the iliac crest side attaches the unit to the post, that can be loosened and adjusted to allow rotation in 5° increments.
- ▶ Allows access to the PSIS before and during surgery. This can help to ensure that the sagittal plane of the pelvis is horizontal at the time of cup implantation.

### PRODUCT NO'S:

4170-00	[Complete Set]
<b>Set Includes / Available Individually:</b>	
4170-03	[Anterior Upright Support]
4170-04	[Anterior Plane Support]
4170-05	[Anterior Clamp Support]
4170-AKS	[Anterior Knob Screw] <i>Two (2) included in Set, One (1) with this product number</i>
4170-AP	[Anterior Plane Pad]
4170-06	[Posterior Sagittal Plane Support]
4170-07	[Posterior 9.5" Post]
4170-PKS	[Posterior Knob Screw]
4170-08	[Posterior Base]
4170-09	[Posterior Angle Adjuster]
4170-T	[Posterior T-Handle Screw]
4170-PP	[Posterior Support Pad] <i>Two (2) included in Set, One (1) with this product number</i>
4150-PS	[Post Screw] <i>Three (3) included in Set, One (1) with this product number</i>
4050-BP	[20" Baseplate Only]
4050-LPD	[Hip Positioner Large Pad]



## Extension Set for Anterior THR Tables


Designed by David Ott, MD

*Designed to add lift to the femoral hook during an anterior THR case and be able to remove without breaking the sterile field*



### PRODUCT NO'S:

8004-00	[Set of One Each]
<b>Also available individually:</b>	
8004-S	[Short Extension] Extension Length: 2" (5,1 cm) Overall Length: 2.6" (6,6 cm)
8004-L	[Long Extension] Extension Length: 3" (7,7 cm) Overall Length: 3.625" (9,2 cm)

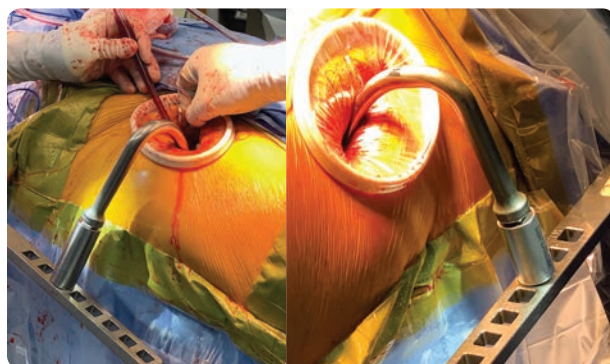





# Thornberry Hip Positioner

Designed by Robert L. Thornberry, MD

*Designed to be adjustable yet sturdy, and is especially helpful when stabilizing a large patient during total hip and revision surgery*

The Thornberry Hip Positioner is designed to attach directly to the operating table utilizing existing table clamps, or the Innomed #2595 Table Clamps, which are not included.

The upper arm assembly can be adjusted for height. Both arms include a push-button to allow the pad platform to swivel and lock into any of three fixed positions. The tall 18" post also includes a push-button to allow the post/arms unit to swivel and lock into any of three fixed positions.

The complete unit is autoclavable except for the foam pads. The pads are made of semi-dense foam to help prevent pressure points and are sealed with a washable coating. The coating also helps to lessen the possibility of skin breakdown.

*It may be necessary to place the Double Table Attachment(s) 180°—sticking out from the table—to accommodate the large patient, as shown at left.*


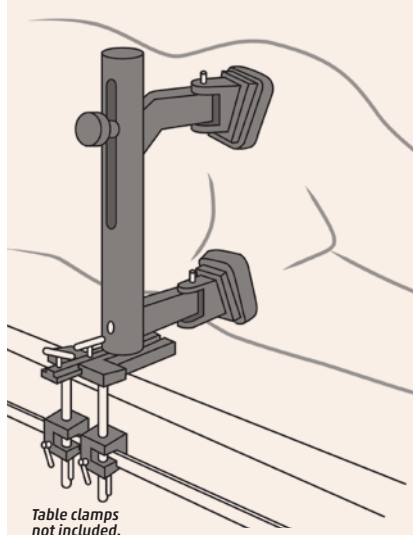


Table clamps not included.

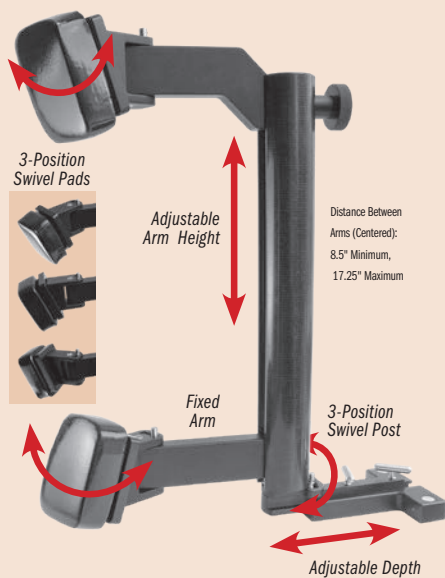

Back Support Unit

Front Support Unit

Table clamps not included.

PRODUCT NO.'S:	
<b>4160-00</b>	[Complete Set]
<b>Items Included in Set:</b>	
<b>4160-07</b>	[7" Back Support Post]
<b>4160-18</b>	[18" Post with Fixed Lower Arm]
<b>4160-AA</b>	[Adjustable Upper Arm]
<b>4160-DTA</b>	[Double Table Attachment]
Two (2) included with set; One (1) only with this number	
<b>4160-PB</b>	[Post Knob]
Two (2) included with set; One (1) only with this number	
<b>4150-P</b>	[Pad Plate for Back Support]
<b>4150-PD3</b>	[Set of Three (3) Pads]
<b>4150-S</b>	[Back Support Slider]
<b>Optional Items:</b>	
<b>2595</b>	[Table Clamp] One only with this number




Positioner consists of:

## Front Support Unit


One 18" post assembly with a lower arm and swiveling pad platform, one upper arm assembly with a swiveling pad platform, one post knob, two pads, and one double table attachment.

## Back Support Unit

One 7" post assembly, one post knob, one pad plate, one pad, one slider, and one double table attachment.

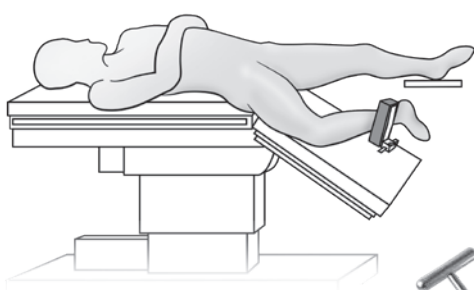

- ▶ Allows one assistant to secure the leg for femoral preparation
- ▶ Attaches directly to a standard operating table
- ▶ Allows easy assessment of hip stability and leg length discrepancy

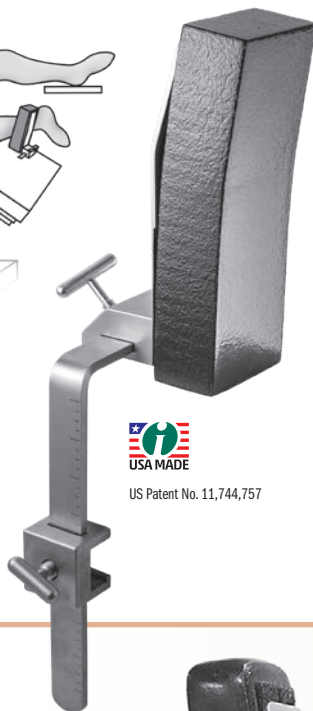

US Patent No. 11,744,757

## Direct Anterior Total Hip Arthroplasty Leg Positoner Assembly

Designed by Benjamin M. Frye, MD

*Designed to help position the operative leg for direct anterior approach total hip arthroplasty using a standard operating table*

### PRODUCT NO'S:

**4165-00** [Assembly]

### Individual/Replacement Parts:

**4165-01** [Leg Support]

Overall Length: 8.75" (22,2 cm)

Width: 2.5" (6,4 cm)

**4165-02** [Calibrated Rod]

Dimensions: 9.625" x 7.125" x 1" (24,5 x 18,1 x 2,5 cm)

**4165-P** [Leg Support Pad]

Dimensions: 8.5" x 3" x 1.75" (21,6 x 7,6 x 4,4 cm)


**4150-PS** [Support Screw]

T-Handle Width: 1.875" (4,7 cm)

T-Handle Depth: 1.5" (3,8 cm)

**9120** [Table Clamp]

Dimensions: 1.7" x 1.7" x 1.4" (4,3 x 4,3 x 3,6 cm)



## Das Anterior Hip Bolster Assembly

Designed by Amal Das, MD

*Designed to help provide counter resistance on the contralateral hip during reaming and implant insertion in direct anterior hip arthroplasty*

### PRODUCT NO'S:

**4166-00** [Das Anterior Hip Bolster Assembly]

### Set Includes / Available Individually:

**4166-01** [Das Anterior Hip Bolster Support]

**4166-02** [Das Anterior Hip Bolster Rod]

### Set Includes / Replacement Parts:


**2595** [Table Clamp]

**4150-PD2** [Positioning Pads - Set of 2]

**4150-PS** [Post Screw]



*New!*

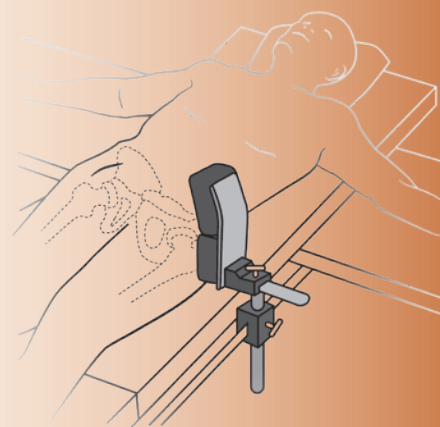

## Cherf Leg Holder

Designed by John Cherf, MD

*Supports the lower extremity for prepping before hip or knee surgery*

Useful for all lower extremity procedures and is particularly helpful for supporting the leg with the patient positioned in the lateral position. By holding the foot/ankle in an externally rotated position, the knee can be locked into extension which helps eliminate the need for manual support.


The leg holder may also be used to support the limb for surgical patients in the supine position such as for knee and foot/ankle procedures.

### PRODUCT NO'S:

**2270**

### Replacement Parts:

**4150-PD3** [Set of 3 Small Pads]

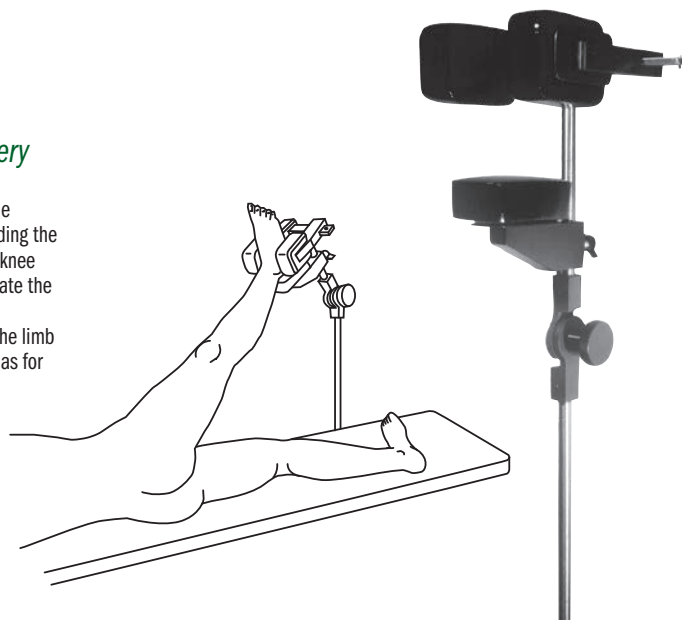



# Capello Patient Positioner


Designed by William Capello, MD

*Provides stable positioning of a patient during hip procedures*

Two-piece board design  
for easy handling  
Interlocking board pieces



Also available in a  
one-piece design

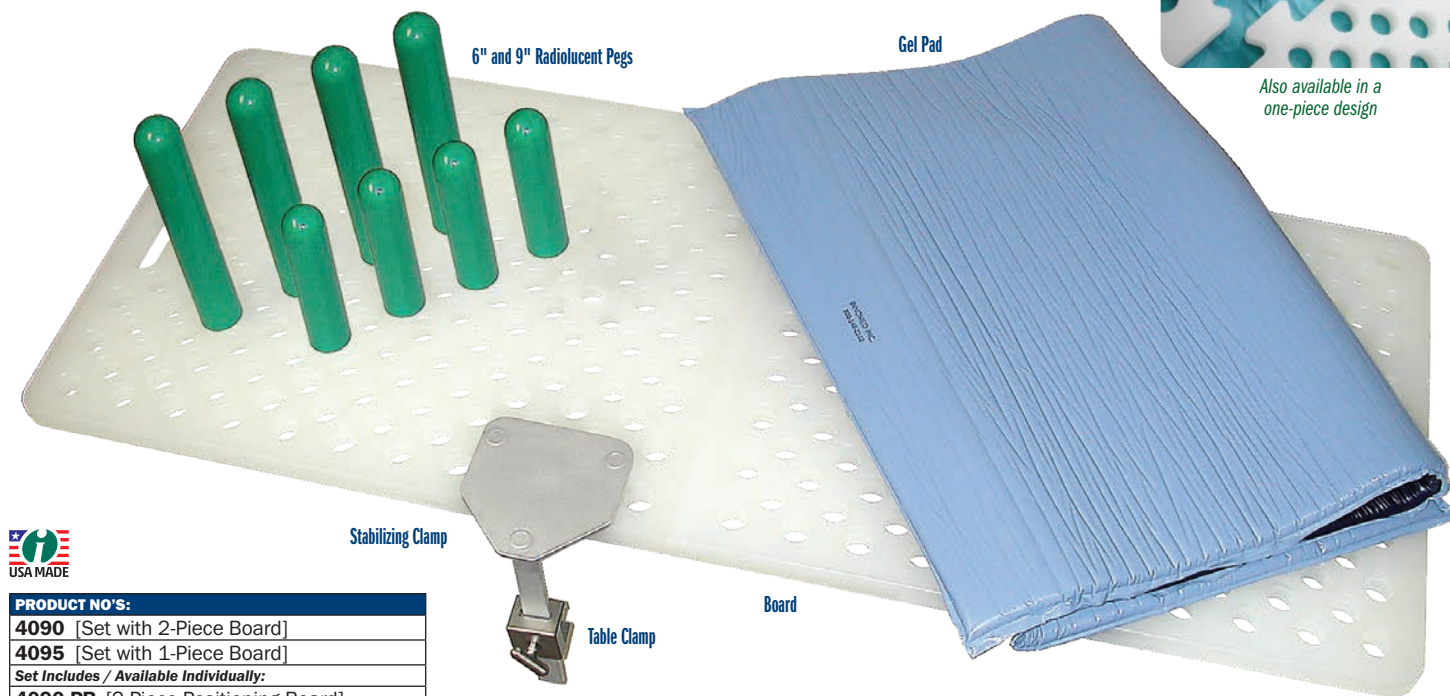

PRODUCT NO'S:	
<b>4090</b>	[Set with 2-Piece Board]
<b>4095</b>	[Set with 1-Piece Board]
<b>Set Includes / Available Individually:</b>	
<b>4090-PB</b>	[2-Piece Positioning Board]
<b>4095-PB</b>	[1-Piece Positioning Board]
<b>4090-06</b>	[6" (15,2 cm) Radiolucent Peg]
Four included in set; one with this product number	
<b>4090-08</b>	[9" (22,9 cm) Radiolucent Peg]
Four included in set; one with this product number	
<b>4090-SC</b>	[Stabilizing Clamp]
Two included in set; one with this product number	
<b>4090-01</b>	[Large Gel Pad]
<b>9120</b>	[Table Clamp]
Two included in set; one with this product number	
Optional Parts:	
<b>4090-02</b>	[Peg Gel Pad]
<b>4090-EXT</b>	[Peg Extension - 4" (10,2 cm)]
<b>4090-EXT6</b>	[Peg Extension - 6" (15,2 cm)]
<b>4090-EXT8</b>	[Peg Extension - 8" (20,3 cm)]


Each set includes:  
Board, Gel Pad,  
(4) 6" Radiolucent Pegs,  
(4) 9" Radiolucent Pegs,  
(2) Stabilizing Clamps,  
(2) Table Clamps.

Optional two-piece board construction allows for easier use and storage. The board is also available in a one-piece design. All gel pads, pegs and peg height extensions can be used with existing peg boards.



Board Dimensions: 47" x 18.75" (119,4cm x 47,6cm)

Optional 4", 6", & 8"  
Peg Extensions

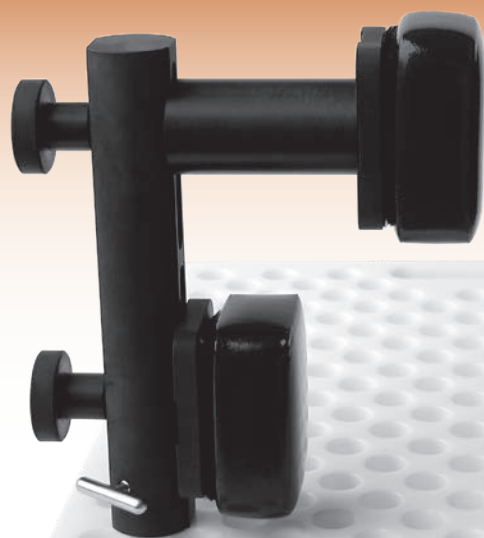

## Large Patient Peg Board Positioner Post Assembly

Designed by Paul Ramsey, MD

*Especially helpful with large patients where reaching the a.s.i.s. is needed for stabilization*

PRODUCT NO'S:	
<b>4150-10P</b>	[Complete Set]
<b>Assembly Set Includes:</b>	
<b>4090-03</b>	[Post Assembly Adapter]
<b>4150-10B</b>	[10" (25,4 cm) Post with 2 Pads]
<b>4150-EXT</b>	[2" (5,1 cm) Spacer with 4" (10,2 cm) Knob]
<b>4150-EXT4</b>	[4" (10,2 cm) Spacer with 6" (15,2 cm) Knob]

**NOTE:** The peg board positioner is available separately and is not included with this assembly set.



Post Assembly Adapter





## Multi-Adjustment Hip Positioner

*Provides stable positioning of a patient during hip surgery*

Multi-adjustment arms allow the positioner to be adjusted to fit all sizes of patients. Extra attachment allows for more versatility of placement. Especially helpful with large patients where reaching the a.s.i.s. is needed for stabilization.

**PRODUCT NO'S:**

**4030**

**Replacement Parts:**

**4150-PD2** [Set of 2 Small Pads]



*Use in Knee Surgery*

*Use in Hip Surgery*

## Berger Block Positioner

Designed by Richard Berger, MD

*Designed for lower extremity positioning with dual height options*



**PRODUCT NO'S:**

**2750-00** [Set]

Dimensions with Pads: 4.75" x 6.75" x 8"  
(12,1 x 17,1 x 20,3 cm)

**Set Includes / Available Individually:**

**2750-01** [Positioner Only]


Dimensions: 4.125" x 6.125" x 8"  
(10,5 x 15,6 x 20,3 cm)

**2750-P** [Positioner Pad Only]

[Brown Strap Only] (2) Included in Set

**Optional Items:**

**2750-S** [Brown Straps] **Pkg of 10**

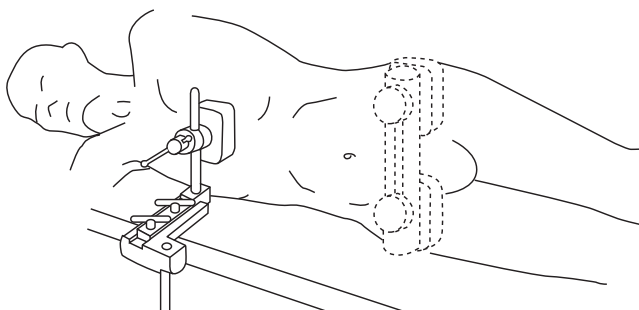

## Wixson/Stulberg Anterior Trunk Support

Designed by R.L. Wixson, MD and S. David Stulberg, MD

*Helps protect the chest and shoulders from slumping forward during total hip surgery*

**PRODUCT NO:**

**4110**






# Chandran Thigh Lift Positioner

Designed by Rama Chandran, MD

Designed to help lift and position the thigh from above during knee surgery



**New!**

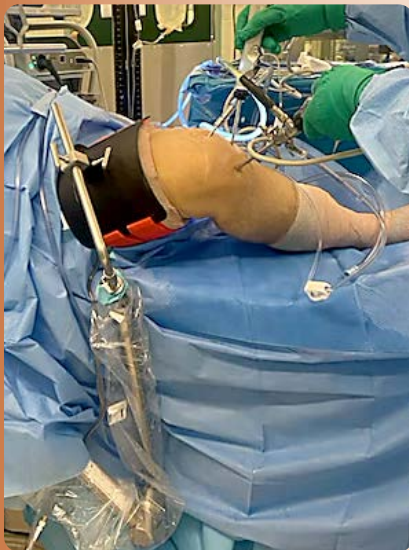

The optional thigh lift adapter is designed for use with a hydraulic lift device instead of the manual lift rod with table clamp.

**Set #4167-00**

PRODUCT NO'S:
<b>4167-00</b> [Positioner Set]
<b>Set Includes:</b>
<b>4167-01</b> [Cradle] Dimensions: 7.5" x 7.75" (19,1 x 19,7 cm)
<b>4167-02</b> [Rod] Width: 13.6" (34,5 cm) Height: 20.6" (52,3 cm)
<b>4150-PS</b> [Post Screw] Two included in set, one with this product number
<b>2760-P</b> [Silicone Pad] Dimensions: 9" x 8" x 1/2" thick (22,9 x 20,3 x 1,3 cm)
[Orange Strap] Dimensions: 2" x 31.5" (5,1 x 80 cm) Two included in set, see below for replacement 10-pack
[Short Black Straps] Dimensions (Each): 2" x 24" (5,1 x 61 cm) Two included in set, see below for replacement 10-pack

PRODUCT NO'S:
<b>Replacement Parts:</b>
<b>2760-P</b> [Silicone Pad] Dimensions: 9" x 8" x 1/2" thick (22,9 x 20,3 x 1,3 cm)
<b>8129-P</b> [Short Black Straps] 10-Pack Dimensions (Each): 2" x 24" (5,1 x 61 cm)
<b>8130-P</b> [Orange Straps] 10-Pack Dimensions (Each): 2" x 31.5" (5,1 x 80 cm)

PRODUCT NO'S:
<b>Optional Parts:</b>
<b>4167-03</b> [Adapter] Width: 12.4" (31,5 cm) Height: 4.875" (12,4 cm)
<b>9125</b> [Rotating Table Clamp]

**Optional Adapter #4167-03**

**Optional Rotating Table Clamp #9125**

## Leg Positioner Sterile Protective Pad & Wrap

Disposable, latex-free sterile foam pad and cohesive wrap helps protect patient from pressure sores, abrasions and possible neurological impairment while securing foot into the boot



Compatible with the Innomed's Stulberg, Robb and Lombardi Leg Positioners



PRODUCT NO:
<b>2629-00</b> [Case of 10 Sets]
<b>2629-L</b> [1 Set]



Each set includes 1 Pad and 1 Wrap.



## Lombardi Leg Positioner

Designed by Adolph V. Lombardi Jr., MD

*Designed to hold the leg during total knee surgery, the unrestricted design helps allow for manipulation of the leg*

- ▶ The footpiece consists of an open topped boot, separated with four spacers and attached to a boot support plate.
- ▶ The support plate is bent beyond the rear of the boot to help provide support in different positions of flexion/extension.
- ▶ The spacers allow for room to clean between the boot and support plate.
- ▶ Two (2) Sterile Pads/Wraps are included with each new purchase. (See page 9 for Pad/Wrap information)

### PRODUCT NO'S:

**2622** [Lombardi Leg Positioner]

Base Length: 13" (33 cm)

Base Width: 7" tapers to 4" (17,8 x 10,2 cm)

Overall Height: 12.75" (32,4 cm)

### Replacement Parts:

**2629-00** [Sterile Pad & Wrap – Case of 10 Sets]




## Robb Leg Positioner

Designed by William Robb, MD

*Provides stable positioning of the knee during surgery*

- ▶ Slotted base allows the leg to be easily flexed or extended during knee surgery
- ▶ Slots are also designed to allow the foot piece to be rotated
- ▶ The complete unit is steam and gas sterilizable
- ▶ Supplied with a sterilizable table clamp which can be clamped over the sterile drape to the O.R. table side bar
- ▶ Three (3) Sterile Pads/Wraps are included with each new purchase (See page 9 for Pad/Wrap information)

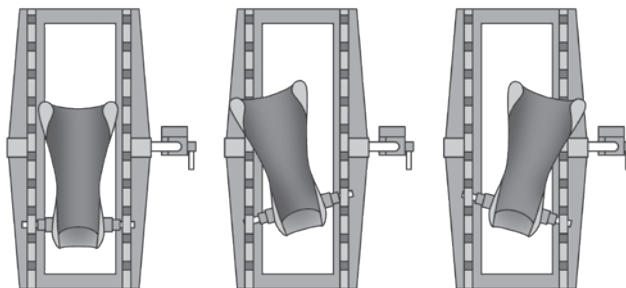

### PRODUCT NO'S:

Base Dimensions: 21" x 11" (53,4cm x 27,9cm)

**2630-11** [Robb Leg Positioner]

### Optional & Replacement Parts:

**2630-FP** [Aluminum Footpiece Only]

**2629-00** [Case of 10 Sterile Pads/Wraps]

**2595** [Table Clamp]





# Stulberg Leg Positioner

Designed by S. David Stulberg, MD

*Provides stable positioning of the knee during surgery*

## PRODUCT NO'S:

Base Dimensions: 20" x 10.5" (50,8 cm x 26,7 cm)

**2620-10** [Stulberg Leg Positioner]


## Optional & Replacement Parts:

**2620-FP** [Aluminum Footpiece Only]

**2629-00** [Case of 10 Sterile Pads/Wraps]




Usage guide available on our website.

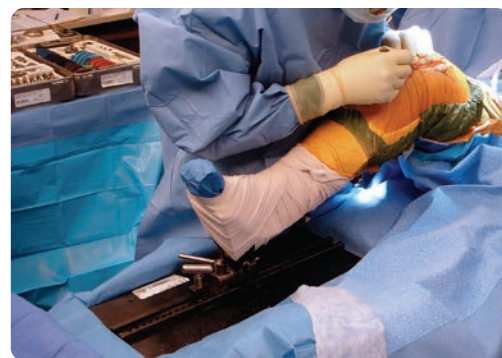


- ▶ Allows the leg to be manipulated into the desired position and securely locked in place
- ▶ Includes the necessary adjustments to tilt, rotate, and flex or extend the knee
- ▶ Extension/flexion adjustments can be made with the quick release of the ratchet
- ▶ In use, the base plate is clamped onto the operating table with the vertical side bar, the base plate is draped, and the sterile support plate lowered into the base plate
- ▶ The patient's foot is wrapped into the foot support with a sterile bandage (additional padding may be used for thin tibias)
- ▶ The complete unit is steam and gas sterilizable
- ▶ Three (3) Sterile Pads/Wraps are included with each new purchase (See page 9 for Pad/Wrap information)

## Tilt Bar

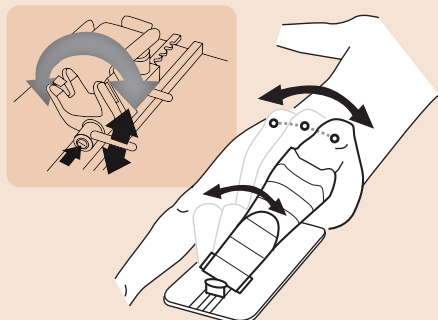


Loosening the Tilt Bar allows the knee to be tilted in either direction. Tightening the bar locks the Yoke System in the desired position.

## Ratchet

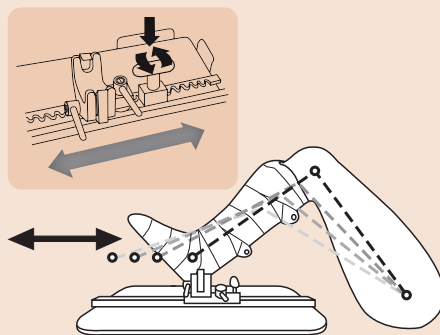


The Ratchet allows the Yoke Assembly to be moved in a precise gradual manner, the length of the Track. For faster adjustments, downward pressure on the Ratchet Handle releases the Yoke Assembly which then can be easily slid the length of the Track.

## Rotation Bar

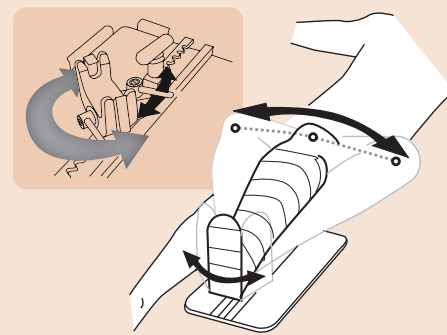

Loosening the Rotation Bar allows the knee to be rotated in either direction. Tightening the bar locks the Yoke System in the desired direction.

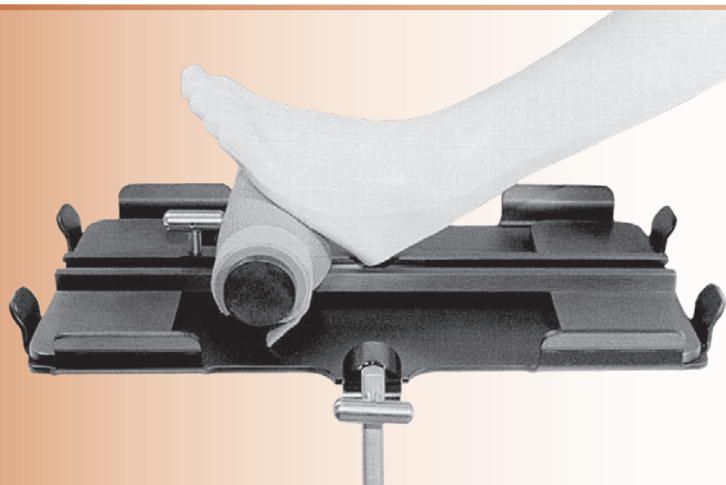

# Stulberg Sliding Bolster

Designed by S. David Stulberg, MD

*Helps eliminate the need for a sand bag during total knee surgery*


The base plate is attached to the table and the sterile sliding bolster is placed on top of the sterile drape. The bolster can be adjusted for different angles of knee flexion during surgery.

## PRODUCT NO:

**2730**

Base Dimensions:  
20" x 10.5" (50,8 cm x 26,7 cm)



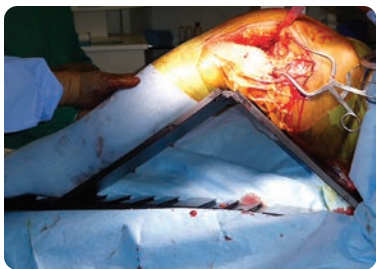

## Adjustable Knee & Tibial Positioner

Designed by Ashutosh Chaudhari, MD

*Adjustable design allows for use in procedures around the knee such as tibial nailing, tibial condyle plating, patella fracture fixation, supracondylar fracture plating, supracondylar fracture nailing, and total knee replacement*

### PRODUCT NO'S:

**2770-00** [Set]

*Includes Positioner, Pad, and Two Short Straps*

### Individual / Replacement Parts

**2770-01** [Positioner]

*Overall Length (Folded): 28" (71,1 cm)*

*Overall Length (Flat): 54.75" (139 cm)*

*Maximum Triangle Height: 14" (35,6 cm)*

*Width: 5.5" (14 cm)*

*Thickness (Folded): 1.8" (4,6 cm)*

*Thickness (Flat): .75" (1,9 cm)*

**2770-P** [Silicone Pad]

*Dimensions: 12" x 5.5" (30,5 cm X 14 cm)*

**2590-S** [Short Straps] Pkg of 10



Radiolucent. Steam sterilizable.

### PRODUCT NO'S:

**2589-00** [Complete Assembly]

*Overall Length: 19" (48,3 cm)*

### Individual/Replacement Parts:

**2589-01** [Foot Positioner]

*Overall Length: 18" (45,7 cm)*

**2590-B** [Positioner Bar]


*Overall Length: 19" (48,3 cm)*

**2730-P** [Pad & Two Straps]

**4150-PS** [Post Screw]

### Optional Parts:


**2590-S** [Black Straps] Pkg of 10

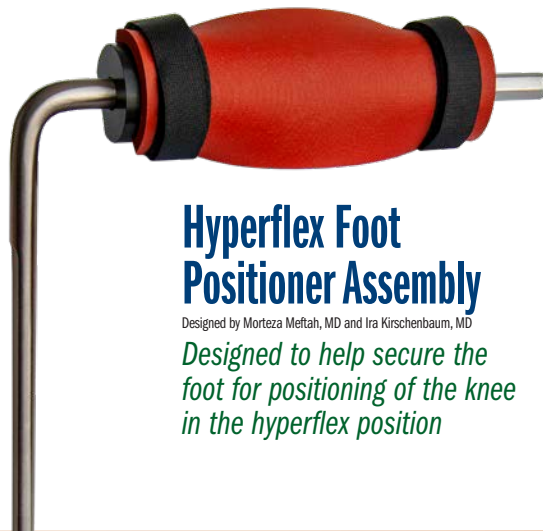

## Hyperflex Foot Positioner Assembly

Designed by Morteza Meftah, MD and Ira Kirschenbaum, MD

*Designed to help secure the foot for positioning of the knee in the hyperflex position*

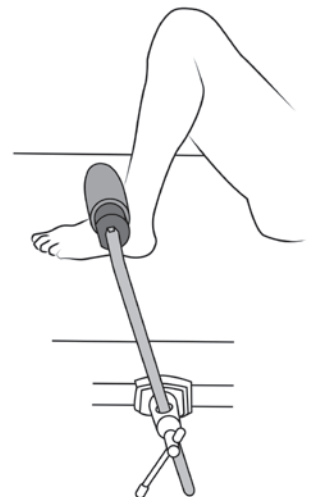


## Patient Self Stress Assembly Set

Designed by Kyle Cook, RTR and David Mauerhan, MD



*Designed to help position a patient for X-ray evaluation to help determine candidacy for Unicondylar Knee Arthroplasty*

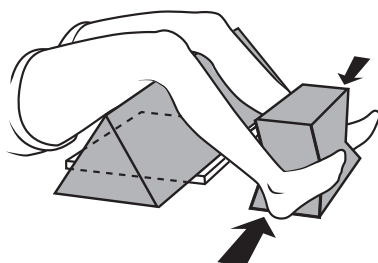

Triangle Positioner  
#2741-01

Contoured Cube  
#2741-02



### PRODUCT NO'S:

**2741-00** [Set]

### Individual Instruments:

**2741-01** [Triangle Positioner]

*Dimensions: 24" x 9" x 9" (61 cm x 23 cm x 23 cm)*

**2741-02** [Contoured Cube]

*Dimensions: 11" x 9" x 6" (28 cm x 23 cm x 15,2 cm)*






## Lower Extremity Leg Positioner

Designed by Ronald Romanelli, MD

*Used to support knee and leg during surgery, and can be used for casting*

- ▶ Utilized for rodding of femurs or tibias
- ▶ Also useful for knee surgery and closures
- ▶ Very supportive, distributes stresses on leg, used instead of bolsters
- ▶ Supplied with one autoclavable silicone pad
- ▶ Aluminum positioner is radiolucent and gas or steam sterilizable

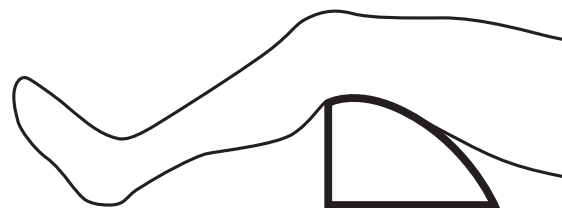

### PRODUCT NO'S:

**2745**

Dimensions: 5.5" H x 9.5" L x 9.25" W  
(12,7 cm x 24,1 cm x 23,5 cm)

### Replacement Parts:

**2760-P** [Silicone Pad]



## Sanders Extremity Positioning Tubes

Designed by Richard A. Sanders, MD

*Designed to support the knee and ankle during lower extremity surgery*

The 6" tube lifts the knee off the operating table and allows for approximately 30° of knee flexion. Very useful for closure of total knee incisions, supporting fractures of the distal femur, and tibia plateau fractures. The 4" tube elevates the foot and ankle for ankle fracture surgery. The tubes are made of aluminum, allowing them to be autoclaved. They help eliminate the need for rolled sheet bolsters.

### PRODUCT NO'S:

**2740-01** [Small]  
Diameter: 4" (10,2 cm)  
Width: 8" (20,3 cm)

**2740-02** [Large]  
Diameter: 6" (15,2 cm)  
Width: 8" (20,3 cm)



## Fromm Femur & Tibia Triangles

Designed by S.E. Fromm, MD \*

Extra Small Triangle designed by S.E. Fromm, MD & Kenneth Merriman, MD

*Used for femur and tibia positioning during nailing, repairs and fractures*

Designed to position and hold the femur and tibia during intramedullary nailing of the tibia, ligament repairs and extremity fractures. Allows knee to be flexed greater than 90° to allow reaming and nail insertion without displacing fracture. The triangles are available in four heights: 8.5", 11", 14", and 16". The three smaller triangles are designed to fit inside the larger triangle for storage. They are supplied with an autoclavable silicone cushioning pad and velcro\* straps. The triangles are also radiolucent and gas or steam sterilizable.

### PRODUCT NO'S:

**2760-00** [Set of 3] Angles: Top 30°, Two Bottom 75°

Set Includes / Available Individually:

**2760-01** [11"] Base: 6" (15,2 cm), Height: 11" (27,9 cm)

**2760-02** [14"] Base: 7" (17,8 cm), Height: 14" (35,6 cm)

**2760-03** [16"] Base: 9" (22,9 cm), Height: 16" (40,7 cm)

Sold Separately - Not In Set:

**2760-XS** [8.5"] Base 5" (12,7 cm), Height: 8.5" (21,6 cm)

Replacement Parts:

**2760-P** [Silicone Pad]

**2760-S** [Straps] Package of 18

**8120-SP** [Straps for XS] Package of 10



\*Velcro® is a registered trademark of the Velcro Companies.




16" #2760-03

14" #2760-02


11" #2760-01

8.5" #2760-XS Sold Separately - Not In Set




### Tibia Reduced For:

- Open Reduction and Internal Fixation (ORIF)
- Application of uni- or multi-plane external fixator
- Knee ligament repairs and/or reconstruction




### Retrograde Femoral Nailing

Triangle holds femur reduced (prevents sagging)



### Retrograde Femoral Nailing




### Tibial Nailing

## Durham Leg Positioner

Designed by Al Durham, MD

*Placed against the thigh, helping to hold the leg upright in knee surgery*

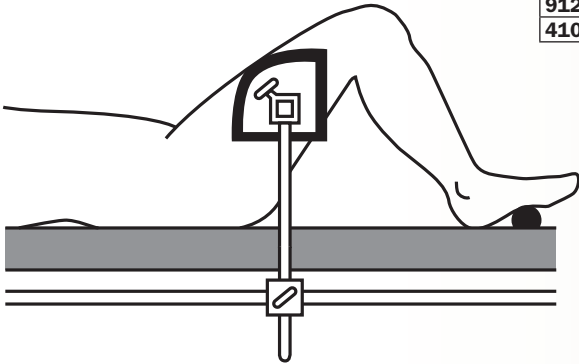

Supplied with a sterilizable table clamp. The pad is made of semi-dense foam to help prevent pressure points and is sealed with a washable coating.


PRODUCT NO'S:	
<b>4105</b>	
Replacement Parts:	
<b>9120</b>	[Table Clamp]
<b>4105-P</b>	[Pad]



## Kirschenbaum Foot Positioner

Designed by Ira Kirschenbaum, MD

*Helps eliminate the use of sand bags under the drape during total knee surgery*

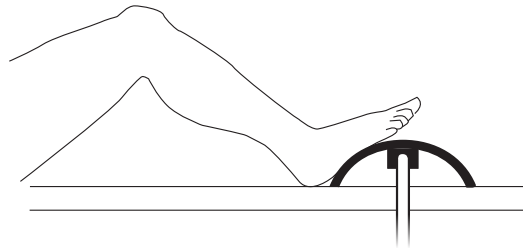

The foot rest is dome shaped for optimal foot contact and positioning the leg in flexion, and can be rotated. The unit can be used under the drape by attaching it to a standard table attachment or it can be sterilized for use on top of the drape. It can be attached to the table with the optional sterilizable table clamp. Supplied with a removable, sterilizable silicone foot pad.



Long #2590

Short #2591




PRODUCT NO'S:	
<b>2590</b>	[Foot Positioner – Long] 15.5" x 6" (39,4 cm x 15,2 cm)
<b>2591</b>	[Foot Positioner – Short] 9.5" x 6" (24,1 cm x 15,2 cm)
Optional & Replacement Parts:	
<b>2590-P</b>	[Large Replacement Pad] 16" x 9" (40,7 cm x 22,9 cm)
<b>2591-P</b>	[Small Replacement Pad] 9.5" x 9.25" (24,1 cm x 23,5 cm)
<b>2595</b>	[Optional Table Clamp]

## Modified 90° Leg Stabilizer

Designed by Gregory Fanelli, MD

*Useful in total knee surgery to hold the leg in position*

Helps to open up the knee joint when pressure is applied to the lower leg. Pad and sterilizable table clamp included.

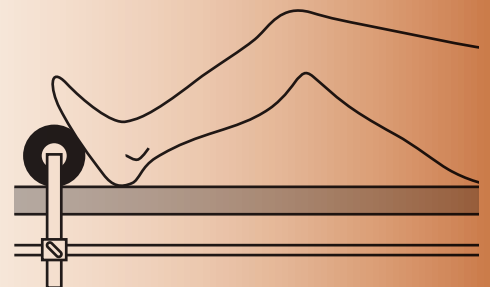

PRODUCT NO'S:	
<b>2725</b>	
Post Height: 11.375" (28,9 cm)	
Pad Length: 9" (22,9 cm)	
Pad Diameter: 3" (7,6 cm)	
Replacement Parts:	
<b>9120</b>	[Table Clamp]
<b>8840-P</b>	[Pad]






# Stanton Arthroscopic Leg Holder

Designed by John Stanton, MD

- ▶ Sliding leg holder can be adjusted for small calves or to accommodate large thighs
- ▶ Locking pin prevents sides from spreading apart
- ▶ Strap can be placed high or low through the slots in the side plates to accommodate large/small limbs
- ▶ Strap is strongly secured with a toothed clamp
- ▶ Support rod, when clamped into a standard table clamp, helps to prevent rotation


PRODUCT NO'S:	
<b>4045</b>	
Dimensions: 16.5" L x 8.5" H x 3.5" W (42 cm L x 21,6 cm H x 9 cm W)	
Fits Legs: From 4" to 11" (10 cm to 28 cm)	
Replacement Parts	
<b>4045-S</b> [Strap]	
Overall Length: 28" (71,2 cm)	

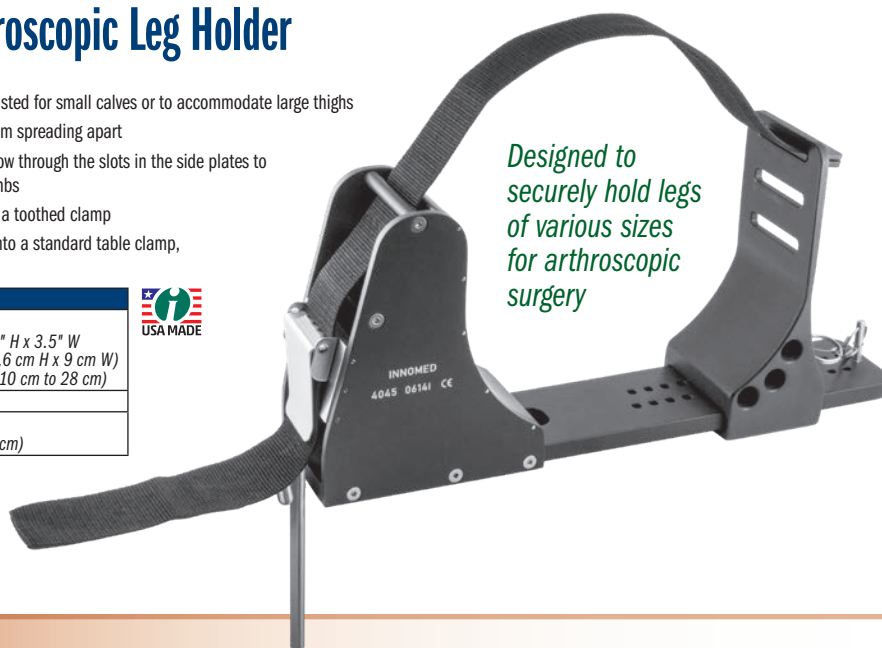


*Designed to securely hold legs of various sizes for arthroscopic surgery*



PROTOTYPE SHOWN

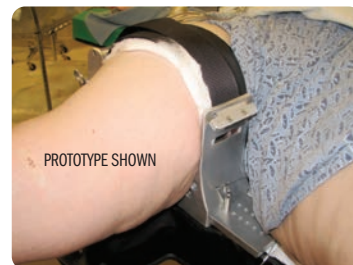

PROTOTYPE SHOWN

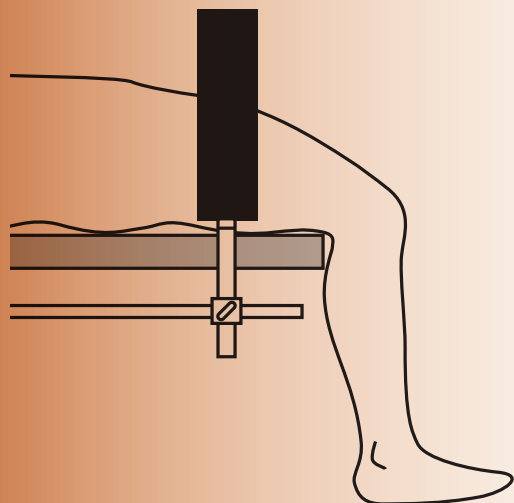


## Leg Stabilizer

Designed by Gregory Fanelli, MD

*Useful in arthroscopic knee surgery to hold the leg in position*

Helps to open up the knee joint when pressure is applied to the lower leg.  
Sterilizable table clamp included.

PRODUCT NO'S:	
<b>8840</b>	
Overall Length: 18.5" (47 cm)	
Handle Length: 9.25" (23,5 cm)	
Pad Diameter: 3" (7,6 cm)	
Replacement Parts:	
<b>9120</b> [Table Clamp]	
<b>8840-P</b> [Pad]	

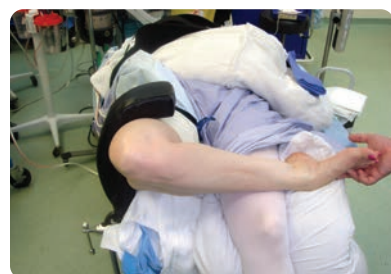

## George Arthroscopic Knee Positioner

Designed by Michael S. George, MD

*Provides lateral as well as superior support which allows valgus stress to open the medial compartment*

Shape does not squeeze the thigh, making the need for a thigh tourniquet optional. If desired, the unit can easily be rotated out of the way without disrupting the sterile field. Using with a standard operating table clamp, the unit can easily be raised or lowered to accommodate all thigh sizes.

PRODUCT NO'S:	
<b>2735</b>	
Overall Height: 22" (55,9 cm)	
Post Height: 12" (30,5 cm)	
Pad Width: 3" (7,6 cm)	
Replacement Parts	
<b>2735-P</b> [Pad]	






## Nicholson Headrest

Designed by Gregory Nicholson, MD

*Helps position the patient for all types of shoulder surgery in the beachchair position*

Designed to provide excellent exposure to the shoulder, the headrest can be used with standard OR tables (with no modifications to the table). The headrest provides patient support and helps position the patient for all types of shoulder surgery—arthroscopic and open—in the beachchair position. It can be quickly placed and adjusted.



A gel pad forehead strap with velcro is included for optional use.

### PRODUCT NO'S:


**2450** [Headrest]

Main Plate Dimensions: 6" x 18" (15,2 x 45,7 cm)  
Neck Offset Adjustment: 8" (20,3 cm)

Includes/Replacement Parts:

**2450-S** [Strap with Gel Pad]

**4150-PD2** [Set of 2 Pads]

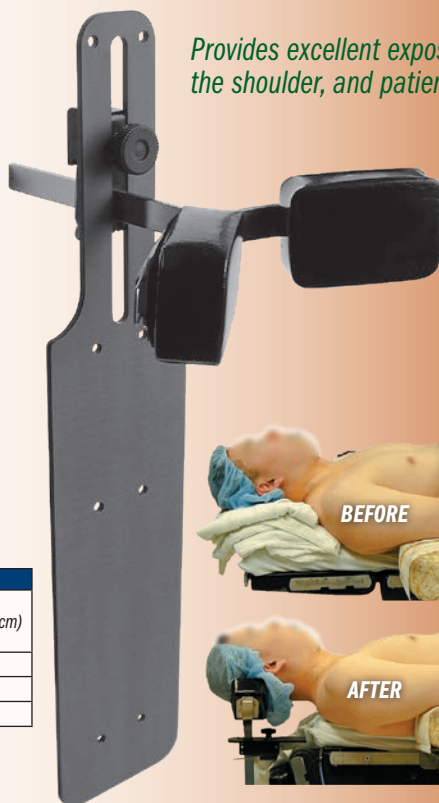

*Provides excellent exposure to the shoulder, and patient support*



# FREE TRIAL

Most instruments a no-charge two-yr includes FREE UPS

\*When shipped to a hos additional charge applie  
Free trial offer exclud  
instruments, which are ava  
pad replacement charge

## Auerbach Arm Holder Rake Retractor Set

Designed by David M. Auerbach, MD

*Allows intraoperative positioning for procedures of the posterior arm, elbow, and forearm*



### PRODUCT NO'S:

**2415-00** [Set]

Individual/Replacement Parts:

**2415-01** [Arm Holder Assembly]

Overall Length: 20" (50,4 cm)  
Arm Holder Dimensions: 14.5" x 4" (36,9 x 10,2 cm)  
Overall Width including Cleats: 7.5" (19,1 cm)

**2415-02** [Arm Holder Upright Rod]

Overall Length: 19.25" (49,9 cm)

**2415-04** [Rake Chain Retractor 4-Prong]

Two included in set, one with this product number  
Overall Length including Chain: 10" (25,4 cm)  
Retractor Width: .75" (1,9 cm)

**2415-06** [Rake Chain Retractor 6-Prong]

Two included in set, one with this product number  
Overall Length including Chain: 10" (25,4 cm)  
Retractor Width: 1.25" (3,2 cm)


**2595** [Table Clamp]

**2770-P** [Silicone Pad]

Dimensions: 12" x 5.5" (30,5 x 14 cm)

Replacement Parts:

**2590-S** [Black Straps] Pkg of 10

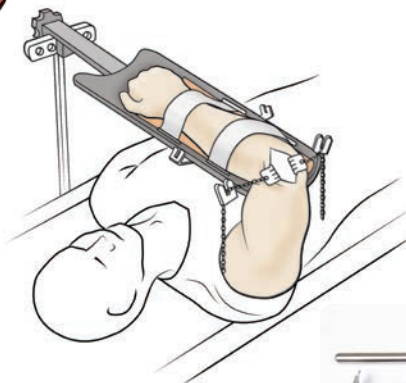

- ▶ Simple design for fast and easy positioning
- ▶ Connects over the drape in the sterile field using the supplied rail clamp and post
- ▶ Can be repositioned during surgery
- ▶ Sterilizable rubber pad protects the arm
- ▶ Retractors for the skin and soft tissues connect to the holder
- ▶ Compact for easy storage

Set includes: Arm Holder Upright and Assembly, (2) 4-Prong Chain Retractors, (2) 6-Prong Chain Retractors, (2) Black Straps, Silicone Pad, and Table Clamp.







are available for  
week evaluation –  
Ground Shipping\*

ospital or medical center;  
s for expedited shipping.  
es implant extraction  
ilable as rentals. There is a  
with the hip positioners.

## Distal Humerus Fracture Board

Designed by Burk Young, MD

Allows the surgeon to pin these fractures without having to manually hold the fracture reduced, allowing the surgeon to focus on accurate pin placement and reduction. The height of the crossbar is fully adjustable to accommodate different size patients. Reduction is achieved by an assistant gently applying axial traction through the forearm, with the crossbar applying the counter traction. Pinning is done with the C-arm in the lateral position. An optional separate attachment to support the arm for distal humerus fractures in adults is available. Unit not sterilizable.

### PRODUCT NO'S:

**2445** [Fracture Board – Pediatric]


Main Board Dimensions: 22" x 12" (55,8 cm x 30,5 cm)

Crossbar Height Adjusts From: 4.5" to 7.5" (11,4 cm x 19,1 cm)


**2445-01** [Fracture Board – With Adult Adapter]

Optional/Replacement Part:

**2445-06** [Adult Adapter]

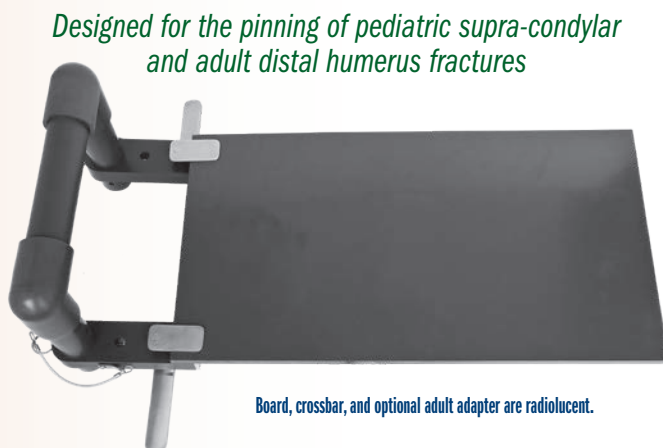

Board, crossbar, and optional adult adapter are radiolucent.

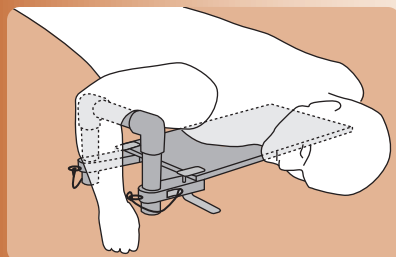


Optional  
ADULT  
Adapter



## Auerbach Hand Positioner Set

Designed by David Auerbach MD

Designed to position and retract the skin for surgical exposures of the hand, wrist and forearm

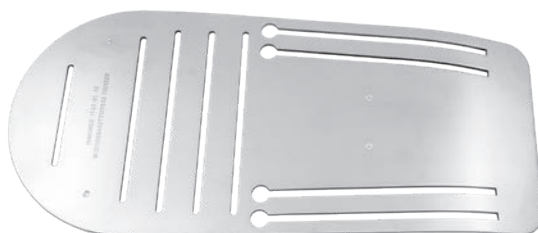

Hand Plate



Hand Tray



Thumb Post

Wrist Strap  
Buckles (2)



Thumb Post Clip

Suction Holder



Retractors (4)



Cord Clips (7)



Wrist Straps (2)



Cords (6)

### PRODUCT NO'S:

**1747-00** [Auerbach Hand Positioner Set]

Also available individually:

**1747-01** [Hand Plate]

Dimensions: 15" x 7" (38,1 x 17,8 cm)

**1747-02** [Hand Tray]

Dimensions: 13.75" x 9.75" (34,9 x 24,8 cm)

**1747-03** [Thumb Post]

**1747-03-C** [Thumb Post Clip]

**1747-04** [Cord Clip]

Seven (7) included in Set, One (1) with this product number.

**1747-05** [Retractor]

Four (4) included in Set, One (1) with this product number.

**1747-06** [Wrist Strap Buckle]

Two (2) included in Set, One (1) with this product number.

**1747-07** [Wrist Strap]

Two (2) included in Set, One (1) with this product number.

**1747-08-6** [Set of 6 Cords]

**1747-09** [Suction Holder]



Thumb Post & Clip  
Shown attached to plate

Suction Holder  
Insert in any corner  
to help remove blood  
accumulating in tray



## Table Clamps *Designed to help clamp and hold a device to the table*



### For Use with these Innomed Positioning Devices:

- ▶ Auerbach Arm Holder Rake Retractor Set
- ▶ Freeman Arm Holder
- ▶ Kirschenbaum Foot Positioners
- ▶ Robb Leg Positioner
- ▶ Thornberry Large Patient Hip Positioner

**PRODUCT NO:**  
**2595** [Table Clamp]



**PRODUCT NO:**  
**9121** [Clark Style Table Clamp]




*New!*



### For Use with these Innomed Positioning Devices:

- ▶ Capello Patient Positioner
- ▶ Direct Anterior Total Hip Arthroplasty Leg Positioner
- ▶ Durham Leg Positioner
- ▶ Leg Stabilizer
- ▶ Modified 90° Leg Stabilizer


**PRODUCT NO:**  
**9120** [Table Clamp]

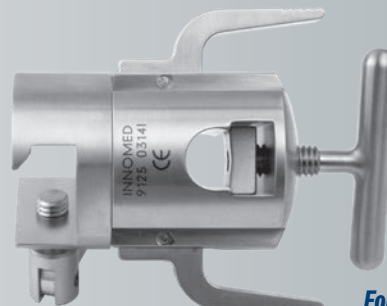

### For Use with these Innomed Positioning Devices:

- ▶ Wixson Anterior Suspension Hook System
- ▶ Chandran Thigh Lift Positioner

**PRODUCT NO:**  
**9125** [Rotating Table Clamp]

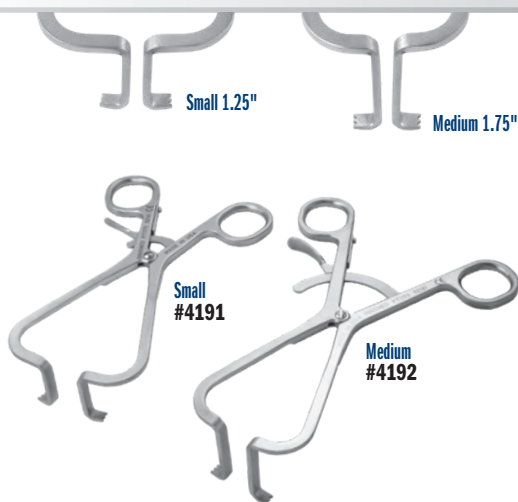

## Flat Gelpi Retractors

*Designed to help retract a broader area of soft tissue or muscle*

### PRODUCT NO'S:


**4191** [Small]  
Overall Length: 6.5" (16,5 cm)  
Prong Depth: 1.25" (3,2 cm)

**4192** [Medium]  
Overall Length: 7.25" (18,4 cm)  
Prong Depth: 1.75" (4,4 cm)

**4193** [Large]  
Overall Length: 9" (22,9 cm)  
Prong Depth: 3" (7,6 cm)

**4194** [Deep]  
Overall Length: 10" (24,4 cm)  
Prong Depth: 5" (12,7 cm)

*The two largest sizes feature an ergonomic handle for increased comfort and control.*

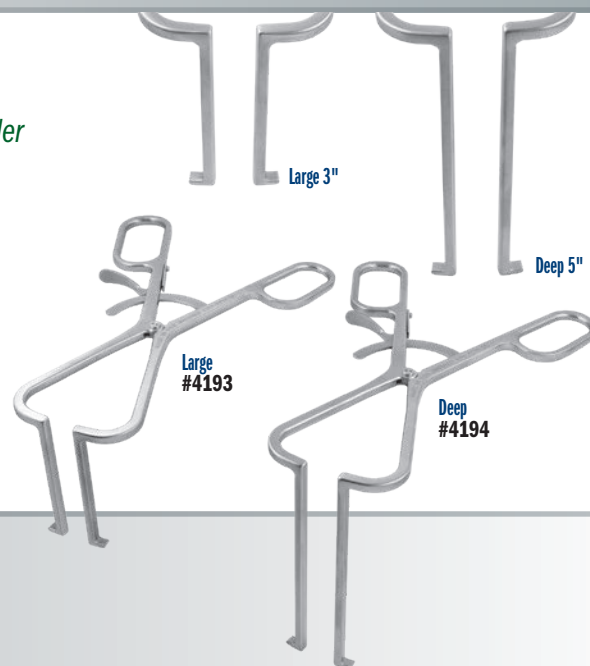

## Gelpi Retractors

### PRODUCT NO'S:

**4180** [Standard]  
Overall Length: 7.75" (19,7 cm)

**4181** [With Ergonomic Handle]  
Overall Length: 8.75" (22,2 cm)






## Meyering Type Retractors

Designed for general use  
soft tissue retraction

MADE EXCLUSIVELY  
FOR INNOVIMED IN  
GERMANY


Features a non-glare finish.

**New!**

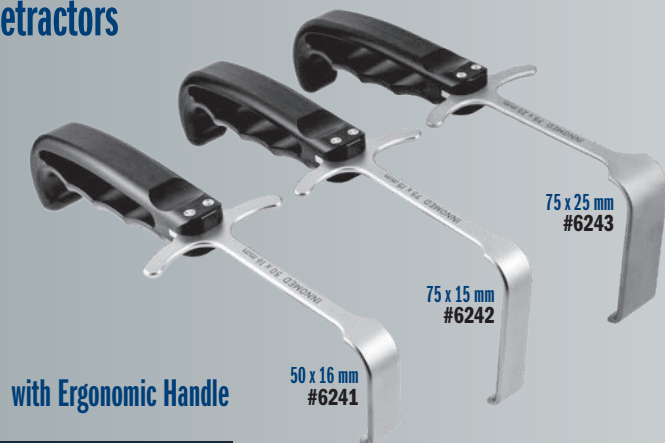

with Ergonomic Handle

with Contour Grip

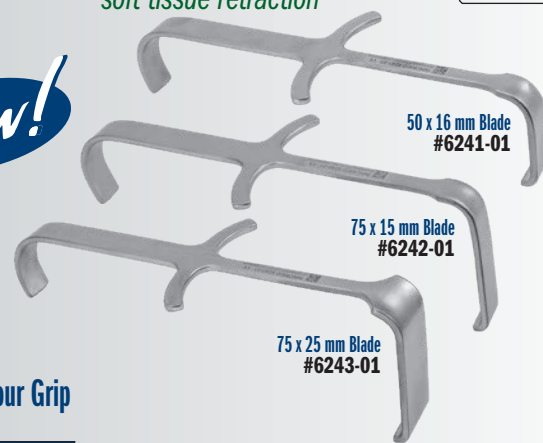

### PRODUCT NO'S:

**6241** [50 x 16 mm]  
Overall Length: 8.875" (22,5 cm)  
Blade Width: 16 mm  
Blade Depth: 50 mm

**6242** [75 x 15 mm]  
Overall Length: 9" (22,9 cm)  
Blade Width: 15 mm  
Blade Depth: 75 mm

**6243** [75 x 25 mm]  
Overall Length: 9" (22,9 cm)  
Blade Width: 25 mm  
Blade Depth: 75 mm

### PRODUCT NO'S:

**6241-01** [50 x 16 mm]  
Overall Length: 8.5" (21,6 cm)  
Blade Width: 16 mm  
Blade Depth: 50 mm

**6242-01** [75 x 15 mm]  
Overall Length: 8.75" (22,2 cm)  
Blade Width: 15 mm  
Blade Depth: 75 mm

**6243-01** [75 x 25 mm]  
Overall Length: 8.75" (22,2 cm)  
Blade Width: 25 mm  
Blade Depth: 75 mm

## Rake Retractors

Designed for soft tissue retraction

Features a non-glare finish.

**New!**



with Ergonomic Handle

with Contour Grip

3-Prong Blade #4839-04


3-Prong #4839

### PRODUCT NO'S:

**4839** [3-Prong, Ergonomic Handle]  
Overall Length: 9.5" (24,1 cm)  
Rake Width: 13 mm  
Rake Depth: 14 mm

**4839-04** [3-Prong, Contour Grip]  
Overall Length: 8.125" (20,6 cm)  
Rake Width: 13 mm  
Rake Depth: 14 mm

MADE EXCLUSIVELY  
FOR INNOVIMED IN  
GERMANY



## Stulberg Incision Close Gelpi & Blade Set

Designed by S. David Stulberg, MD

Designed to help expose  
difficult to visualize  
areas at the end  
of incisions



### PRODUCT NO'S:

**4269-00** [Set - 1 Gelpi & 1 Blade]

Also available Individually:

**4269-01** [Gelpi]  
Overall Length: 7.5" (19,1 cm)  
Maximum Spread Width: 3.625" (9,2 cm)

**4269-02** [Blade]  
Overall Length: 5.5" (14 cm)  
Blade Width: 1" (2,54 cm)  
Blade Depth from Bend: 1.5" (3,8 cm)  
Blade Bend-Back Angle: 130°


USA MADE



## Incision Aligner

Designed by DMP

Designed to align an  
incision during closing

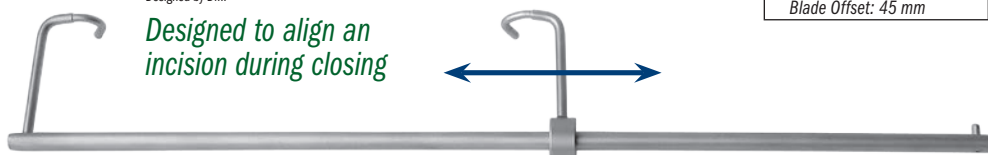


USA MADE

### PRODUCT NO:

**1330**

Overall Length: 14" (35,6 cm)  
Blade Offset: 45 mm

The bent ends of the aligner are placed at each end of an incision, which is aligned by pulling outward on each end. The sliding end will lock in place when it is tensioned. Pressing inward slightly on the sliding end will allow the aligner to be collapsed and removed.

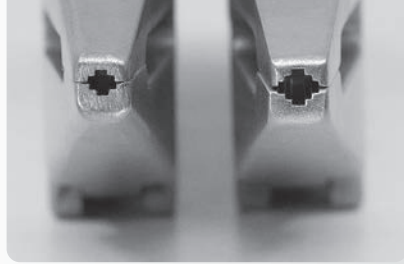

## Screw/Pin Removal Locking Pliers

*Unique jaw designed to solidly grip and clamp onto a screw head, broken screw, or pin for removal*

**Small  
Jaw End & Bite**  
Designed to securely grab pins as small as 1.4 mm (.055") up to 2.4 mm (.095")

**Standard  
Jaw End & Bite**  
Designed to securely grab larger pins, screw heads, or broken screws

Standard #S0142

Small #S0142-01

Reduced jaw size for smaller screws, pins and incisions



### PRODUCT NO'S:

**S0142** [Standard]  
Overall Length: 7.875" (20 cm)  
Jaw Width at End: 4 mm

**S0142-01** [Small]  
Overall Length: 7.875" (20 cm)  
Jaw Width at End: 4 mm

## Screw Extractor with Speed Lock

Designed by Khaled Sarraf, MD & Konstantinos Doudoulakis, MD

*Universal extractor designed to accommodate a large range of screws and screw heads from 3.95 to 9.5 mm*

Can also be used to help with removal of other devices that may require a twisting universal locking gripper.

### PRODUCT NO:

**2021**

Overall Length: 9.25" (23,5 cm)  
Jaw Width: 11 mm  
Jaw Length: 5 cm



## Screw Removal Pliers

*Jaw designed to grasp onto a screw or screw head to help in removal*

### PRODUCT NO:

**2020**

Overall Length: 8 (20,3 cm)



## Long Jaw Needle Nose Pliers

### PRODUCT NO:


**1833**

Overall Length: 7" (17,8 cm)  
Jaw Length: 2.25" (5,7 cm)  
Jaw Width Tapered from: 8 mm to 1.5 mm  
Jaw Height Tapered from: 12 mm to 2.5 mm

MADE EXCLUSIVELY  
FOR INNOMED IN  
GERMANY





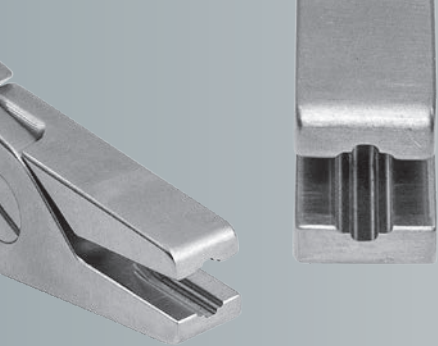


## Screw Removal Locking Pliers

*Designed to solidly grip and clamp onto a screw head, broken screw, or pin for removal*

**New!**

**PRODUCT NO:**  
**2022-01**  
Overall Length: 8" (20,3 cm)

MADE FOR INNOVIMED IN GERMANY

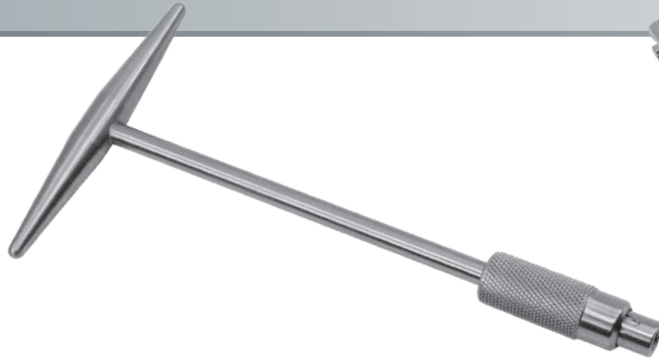

## T-Handle with AO-End

**PRODUCT NO:**  
**2022-T**  
Overall Length: 5.9" (15 cm)  
Handle Width: 3.15" (8 cm)


MADE FOR INNOVIMED IN GERMANY

**New!**

## Large T-Handle Fixed Drivers


*Large easy grip soft silicone handled drivers help provide a sturdy non-slip grip*

PRODUCT NO'S:	
<b>8248</b>	[Zimmer Hall Quick-connect]
Overall Length: 5.75" (15,6 cm) Handle Width: 4.625" (11,6 cm)	
<b>8248-01</b>	[Reverse Quick-connect Zimmer Hall]
Overall Length: 5.75" (15,6 cm) Handle Width: 4.625" (11,6 cm)	
<b>8249</b>	[Hudson Quick-connect]
Overall Length: 6.75" (17,1 cm) Overall Length with Pin In Handle: 11.5" (29,2 cm)	

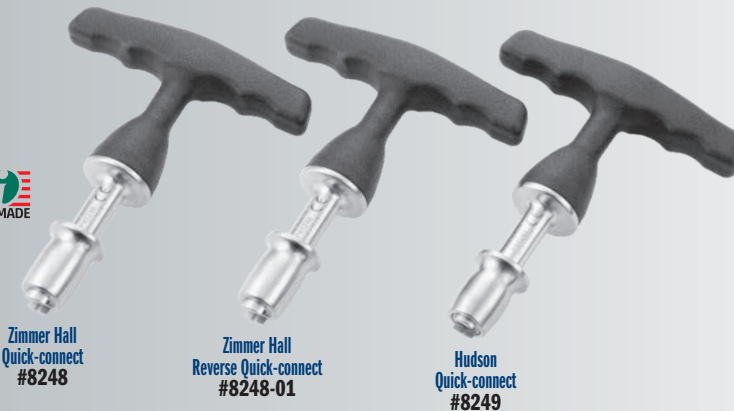

The two standard Quick-connect models release by pulling the collar backward, while the Reverse Quick-connect model is designed to have the collar be pushed forward for release.

PRODUCT NO'S:	
<b>8247-00</b>	[T-Handle Chuck & Key]
<b>8247-01</b>	[T-Handle Chuck Only]
<b>8247-02</b>	[Chuck Key Only]

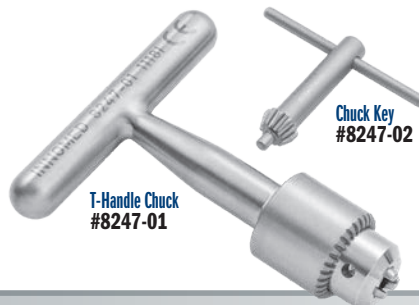



## T-Handle Chuck & Key

## Dodson Extremity Skin Saver

Designed by Mark A. Dodson, MD

*Designed to help protect the patient's skin when removing a disposable tourniquet*

**PRODUCT NO:**  
**8628**  
Overall Length: 4.75" (12,1 cm)  
Width: 1.5" (3,8 cm)  
Lip: .5" (1,3 cm)

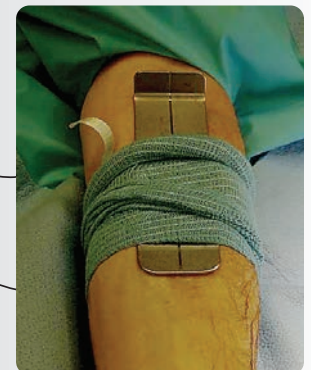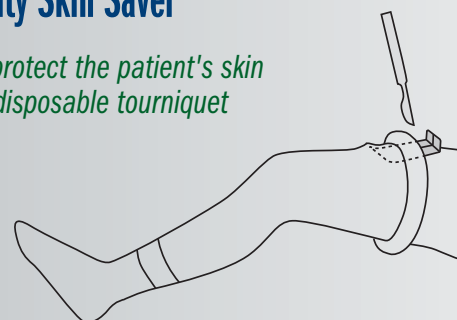

## Bechtold Ergonomic Orthopedic Mallet

Designed by Dustin Bechtold, MD

- ▶ Stainless steel head and shaft with an aluminum handle with a right-handed grip
- ▶ Large and small striking heads with smooth surface
- ▶ Palmar side of the mallet features a flat surface to slide along a broach or impacting type instrument for back slapping and serves well as an additional striking surface



### PRODUCT NO:

**7822**

Overall Length: 10.75" (27,3 cm)  
Head Width: 4" (10,2 cm)  
Large Head Diameter: 2" (5,1 cm)  
Small Head Diameter: 1.5" (3,8 cm)



*Ergonomically designed for forward and backward strikes, featuring an ergonomic handle with a tamp*

## Soft Impact Mallets with Easy Grip Handles

Weidman handle designed by Kevin Weidman, MD

Filled with a shock-absorbing media and has a flat striking surface to keep the mallet centered on an instrument while providing less bounce or wasted force.

The comfortable Easy Grip handle is made of a textured silicone that helps prevent the surgeon's gloved hand from slipping and helps maintain a solid grip. The bottom can also be used to tap an implant in place.


The mallet with delrin head features a replaceable delrin head.

### Easy Grip Handles

Textured  
Soft  
Silicone



Comfortable grip helps prevent the surgeon's gloved hand from slipping and helps maintain a solid grip.

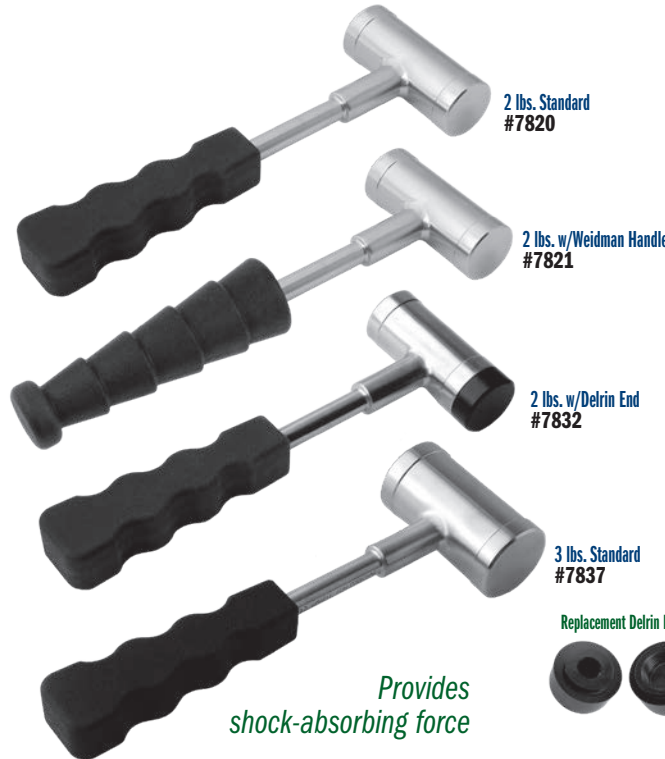

### PRODUCT NO'S:

**7820** [2 lbs. Standard]

Weight: 2 lbs. (.907 kg)  
Overall Length: 10.5" (26,7 cm)  
Handle Length: 5" (12,7 cm)  
Head Width: 3.5" (8,9 cm)  
Head Diameter: 1.375" (3,5 cm)

**7821** [2 lbs. w/Weidman Handle]

Weight: 2 lbs. (.907 kg)  
Overall Length: 10.625" (27 cm)  
Grip Length: 5.5" (14 cm)  
Head Width: 3.5" (8,9 cm)  
Head Diameter: 1.375" (3,5 cm)

**7832** [2 lbs. With Delrin End]

Weight: 2 lbs. (.907 kg)  
Overall Length: 10.5" (26,7 cm)  
Handle Length: 5" (12,7 cm)  
Head Width: 3.5" (8,9 cm)  
Head Diameter: 1.375" (3,5 cm)

**7837** [3 lbs. Standard]

Weight: 3 lbs. (1,35 kg)  
Overall Length: 11" (27,9 cm)  
Handle Length: 5" (12,7 cm)  
Head Width: 3.5" (8,9 cm)  
Head Diameter: 1.875" (4,8 cm)

### Delrin Head Replacements for 7832:

**7832-HEAD01** [.5" Stud] Single

**7832-HEAD02** [.5" Stud] 3-Pack

**7832-HEAD03** [.875" Stud] Single

**7832-HEAD04** [.875" Stud] 3-Pack

Replacement Delrin Heads



Provides  
shock-absorbing force

## Ortho Mallets with Easy Grip Handles

These solid stainless steel mallets each have a comfortable 4½" grip made of a textured silicone that helps prevent the surgeon's gloved hand from slipping and helps maintain a solid grip.


### PRODUCT NO'S:

**7810** [Small]

Overall Length: 8" (20,3 cm)  
Handle Length: 4.5" (11,4 cm)  
Head Weight: 1 lb. (.45 kg)  
Head Diameter: 1.3125"

**7815** [Large]

Overall Length: 8" (20,3 cm)  
Handle Length: 4.5" (11,4 cm)  
Head Weight: 1.75 lb. (.8 kg)  
Head Diameter: 1.5" (3,8 cm)

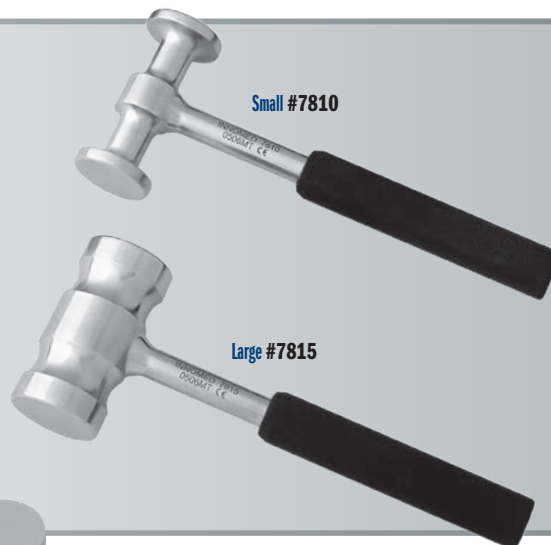

### Easy Grip Handles Textured Soft Silicone



Comfortable grip helps prevent the surgeon's gloved hand from slipping and helps maintain a solid grip.

## Jones Mallet

Designed by Dickie Jones, MD

*Unique hand fitting shape provides superior gripping strength*



This striking instrument has a unique hand fitting shape that provides superior gripping strength for accurate light to heavy impaction.



### PRODUCT NO:

**7825** [2.4 lbs]


Overall Length: 8.25" (21 cm)  
Head Width: 3" (7,6 cm)  
Head Diameter: 1.5" (3,8 cm)





## Ortho Mallets


Larger diameter handle for better grip, and longer

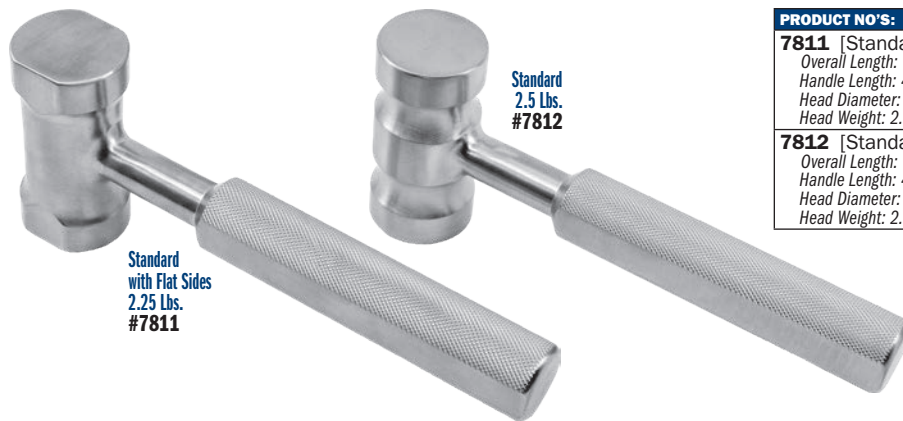

Standard with Flat Sides  
2.25 Lbs.  
#7811

Standard  
2.5 Lbs.  
#7812

PRODUCT NO'S:	
<b>7811</b>	[Standard with Flat Sides] Overall Length: 7.75" (19,7 cm) Handle Length: 4.812 (12,2 cm) Head Diameter: 1.5" (3,8 cm) Head Weight: 2.25 lb. (1.02 kg)
<b>7812</b>	[Standard] Overall Length: 7.75" (19,7 cm) Handle Length: 4.812 (12,2 cm) Head Diameter: 1.5" (3,8 cm) Head Weight: 2.5 lb. (1.13 kg)

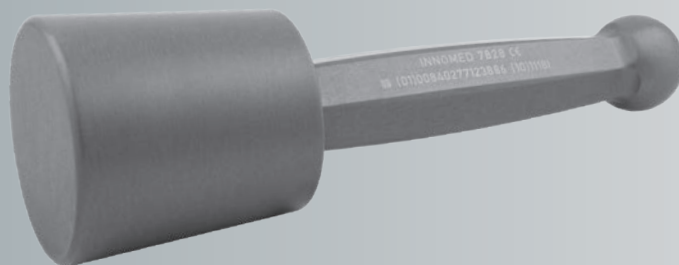

## Aluminum Tapered Maul/Mallet

The large surface area allows the surgeon to focus on the action area of the instrument being struck, instead of making sure the mallet will strike the end of the instrument, much like a sculptors mallet

PRODUCT NO:	
<b>7828</b>	[2.5 lbs] Overall Length: 9.15" (23,2 cm) Handle Length: 6" (15,2 cm) End Diameter: 3" (7,6 mm)




## Articulated Measuring Device with Ruler

Designed by Vincent Y. Ng, MD

A highly precise (within 1 mm) device designed for measuring distances between two points — can be used even if there are intervening structures like soft tissue or bone, and in situations where a straight ruler will not work

PRODUCT NO'S:	
<b>2026-00</b>	[Measuring Device with Ruler]
<b>Set Includes/ Available Separately:</b>	
<b>2026-01</b>	[Measuring Device Only] Overall Length (unfolded): 15.25" (38,8 cm) Dimensions Triangle Folded: 4" x 4.25" (10,2 x 10,8 cm)
<b>2026-02</b>	[Ruler Only] Overall Length: 9" (22,9 cm) Width: .79" (2 cm)

Example of use include measuring limb length in total hip arthroplasty, confirming length in megaprosthesis knee replacements, and assessing dimensions of allografts.

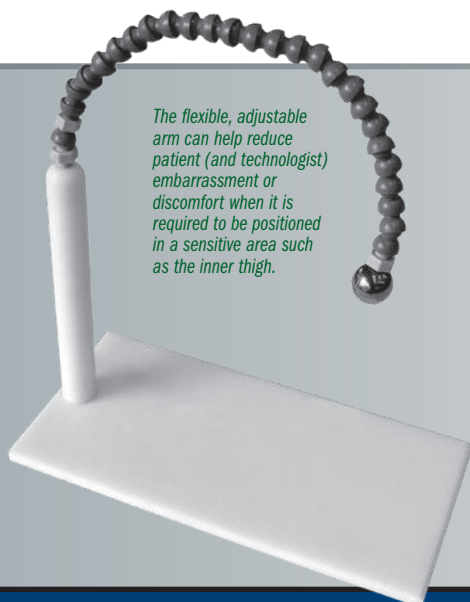

The flexible, adjustable arm can help reduce patient (and technologist) embarrassment or discomfort when it is required to be positioned in a sensitive area such as the inner thigh.

## Lombardi Self-holding X-ray Magnification Marker

Designed by Adolph Lombardi, MD

Helps to remove the variable of X-Ray magnification factor from the process of Orthopedic templating

Fully positionable, this orthopedic X-Ray calibration and marking device features a 1" (25.4 mm) stainless steel ball which, when properly positioned at bone level on a precise anatomical plane, will be this exact size when viewed from all angles, allowing it to be used as a calibration marker in surgical planning software applications, helping to gauge the size of other components on that plane. This helps establish precise anatomical measurement.

PRODUCT NO:	
<b>2672</b>	Base Dimensions: 11" x 5.25" (27,9 cm x 13,3 cm) Post Height: 7" (17,8 cm) Arm Maximum Length: 13" (33 cm)





## Stanton Needle Driver

Designed by John L. Stanton, MD, FACS

*Allows a heavy cutting needle such as an OS-6 to be pushed through cancellous bone when re-attaching muscle or tendon*

The groove captures the outer (convex) side of the needle and prevents the needle from spinning even when applying significant pressure. Useful for reattaching the rotator cuff in rotator cuff repairs, as well as in attaching suture anchors.

### PRODUCT NO:

**3042**

Overall Length: 6.75 (17,1 cm)  
Jaw Width: .25" (6,3 mm)



## Kopplin Pain Catheter Insertion Grasper

Designed by Matthew Kopplin, MD

*Designed with flat plate jaws and no teeth to help grasp a small pain catheter tip, allowing for insertion of the pain catheter without damaging the tip*

Markings every 3 cm on shaft with a bold line at 12 cm for depth determination.



### PRODUCT NO:


**1783**

Overall Length: 11.2" (28,5 cm)  
Shaft Length: 8.25" (21 cm)

MADE EXCLUSIVELY  
FOR INNOMED IN  
GERMANY

## Bates Needle Holder with Suture Cutter

Designed by James E. Bates, MD

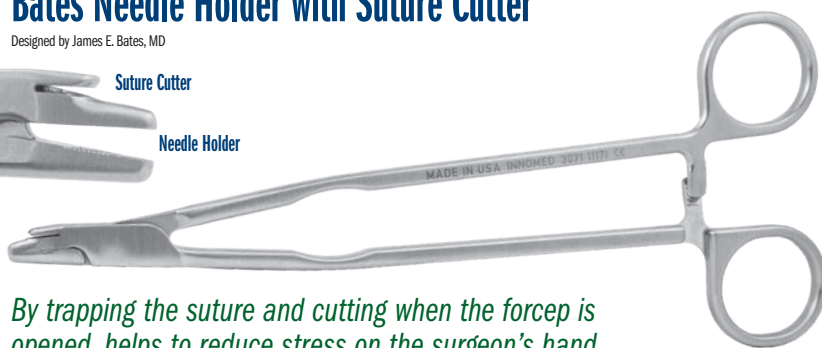



*By trapping the suture and cutting when the forcep is opened, helps to reduce stress on the surgeon's hand*

- ▶ No switching between needle driver and scissors, or need for assistant to cut sutures for you
- ▶ Cutting with opening of forceps reduces possibility of damage to surrounding tissues
- ▶ Sliding the instrument down to the suture knot allows quick and consistent 2 mm suture tails
- ▶ Slip the suture strands into the suture cutting slot and slide the closed instrument along until desired length of tail is achieved, then open the instrument to cut the sutures

### PRODUCT NO:

**3071**

Overall Length: 8.125" (20,6 cm)  
Jaw Width: .25" (6,4 mm)  
Open Jaw Length: .5" (12,8 mm)

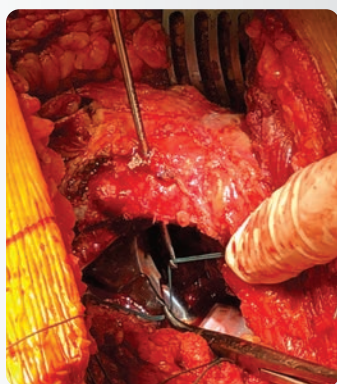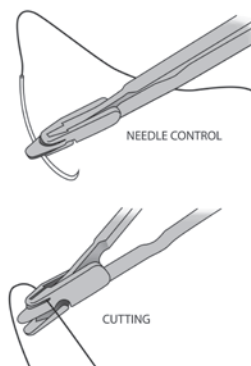

## Straight Suture Passer

Designed by Brian T. Maurer, MD

*Designed to help pass suture through bone*

### PRODUCT NO:

**1111**

Overall Length: 8.125" (20,6 cm)  
Handle Length: 4.25" (10,8 cm)  
Shaft Diameter: 2,5 mm







## Wilke Angled Blunt Nose Scissors

Designed by Benjamin K. Wilke, MD

*Allows blunt dissecting around critical structures (nerves, vessels, etc.) while maintaining a cutting surface for fascia. The tool's blunt ends can also be used for cauterizing and grabbing small vessels.*



**PRODUCT NO:**  
3078  
Overall Length: 6" (15,2 cm)


MADE EXCLUSIVELY  
FOR INNOVIMED IN  
GERMANY



## Orthopedic Needle Holder/Scissors

*Drive a needle and cut a suture without changing instruments*


PRODUCT NO'S:	
<b>Standard Tips</b>	
<b>3070</b>	7.0" (17,8 cm)
<b>Tungsten Carbide Tips</b>	
<b>3055</b>	5.5" (14 cm)
<b>3065</b>	6.5" (16,5 cm)
<b>3075</b>	7.0" (17,8 cm)

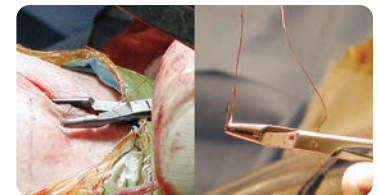

## Rogozinski Locking Needle Driver/Scissors

Designed by Chaim Rogozinski, MD

*Designed with a quick lock & release handle, can drive a needle and cut a suture without changing instruments*

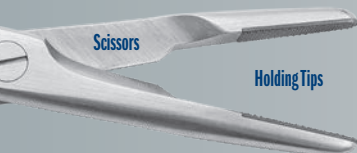

PRODUCT NO'S:	
<b>3083</b>	[Standard] Overall Length: 6.5" (16,5 cm)
<b>3084</b>	[Large] Overall Length: 7.75" (19,7 cm)

MADE EXCLUSIVELY  
FOR INNOVIMED IN  
GERMANY


## Sweed Dissecting Scissors

Designed by Tamer Sweed, FRCS (Orth)

*Designed with a blunt, flat bar fixed to the lower limb, the scissors also act as a dissector to protect underlying vital structures*

**PRODUCT NO:**  
**3081**  
Overall Length: 6.625" (16,8 cm)  
Bottom Pad: 16 mm x 6 mm  
Pad Extension Beyond Scissor: 6 mm

MADE EXCLUSIVELY  
FOR INNOVIMED IN  
GERMANY

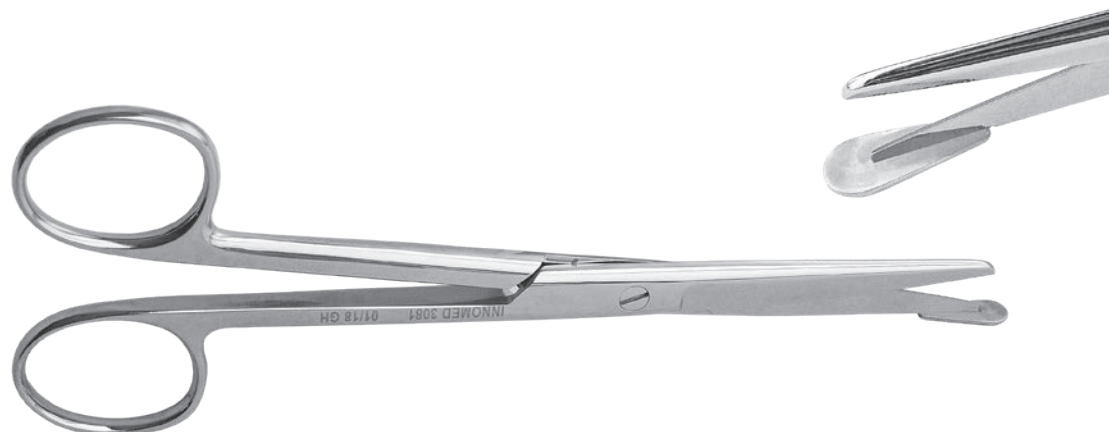



Set consists of one handle and one sterilization/storage case, plus seven double ended screwdriver bits:

Small & Large Single Slot #5195-02

Cross & Cruciate #5195-03

3.5 mm & 4.5 mm Hex #5195-04

Small & Large Phillips #5195-05

#6 & #8 star #5195-08

#10 & #15 star #5195-06

#20 & #25 star #5195-07



Handle  
#5195-01

Helpful during revision total joint surgery where screws have been used, removal of bone plates, fracture fixation screws or bone graft screws.

## Universal Screwdriver Set

*Helps eliminate the opening of multiple sterile packs when a specific size or style of screwdriver is needed*

PRODUCT NO'S:	
<b>5195</b>	[Complete Set with Case]
<b>Set Includes / Available Individually:</b>	
<b>5195-01</b>	[Handle]
<b>5195-02</b>	[Straight (single slot)] Large: 7 x 1.5 mm, Small: 5 x 1 mm
<b>5195-03</b>	[Cross/Cruciate] Large: 7 mm, Small: 6 mm
<b>5195-04</b>	[Hex] Large: 4.5 mm, Small: 3.5 mm
<b>5195-05</b>	[Phillips] Large: 4 mm, Small: 3.5 mm
<b>5195-08</b>	[Small Star: #6 & #8]
<b>5195-06</b>	[Medium Star: #10 & #15]
<b>5195-07</b>	[Large Star: #20 & #25]



## Star Bit Driver Set

*Helps eliminate the opening of multiple sterile packs when a specific size of star bit is needed*

PRODUCT NO'S:	
<b>5194-00</b>	[4 Star Bits w/Handle & Case]
<b>5194-01</b>	[4 Star Bits w/Case only]
<b>Also Available Individually:</b>	
<b>S0113</b>	[Universal 4" (10,2 cm) Handle]
<b>5194-10</b>	[T10 with A/O End]
<b>5194-15</b>	[T15 with A/O End]
<b>5194-20</b>	[T20 with A/O End]
<b>5194-25</b>	[T25 with A/O End]
<b>1025</b>	[Case]



Helpful during revision total joint surgery. Set consists of four star bits – T10, T15, T20, & T25, a handle which accommodates any of the above bits, and a sterilization case. The drive end (A/O) is designed for easy and quick engagement with the universal instrument handle. The ergonomic, modular handle has two connection points, allowing for both straight and T-handle orientations.



PRODUCT NO'S:	
<b>8003-00</b>	[Set – One Each]
<b>Set Includes / Available Individually:</b>	
<b>8003-01</b>	[Torx Bit to Hex Driver Adapter] Overall Length: .6" (1,54 cm)
<b>8003-02</b>	[Hex Bit to Torx Driver Adapter] Overall Length: .6" (1,54 cm)



*Designed for conversion of a 3.5 mm screwdriver*

Hex Bit to Torx Driver Adapter  
#8003-02

Torx Bit to Hex Driver Adapter  
#8003-01

## Torx/Hex Adapter Set

Designed by Stephen M. Walsh, MD

Especially helpful when an articulated, universal joint driver is needed (i.e. acetabular screws)



## Mengato Depth Gauge


Designed by Richard Mengato, MD

*Right-handed design with 3 rings gives 3-point grip for ease of holding and manipulation*

Allows for superior gauge control and manipulation, to advance, engage and maintain the hook on the distal cortex by levering the probe against the bone hole and keeping gentle tension on the hook.



PRODUCT NO:	
<b>1139</b>	
Overall Length – Contracted: 7.125" (18,1 cm)	
Overall Length – Extended: 9.125" (23,2 cm)	
Gauge: 0 to 50 mm	

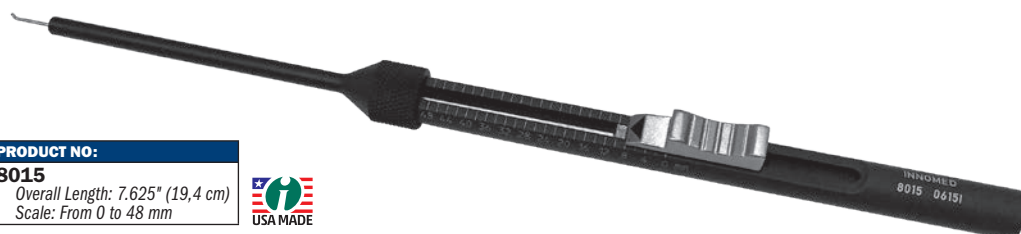


PRODUCT NO:	
<b>8015</b>	
Overall Length: 7.625" (19,4 cm)	
Scale: From 0 to 48 mm	



## Depth Gauge

*Designed to help provide measurement of the depth/length of any bone hole for proper screw length determination*



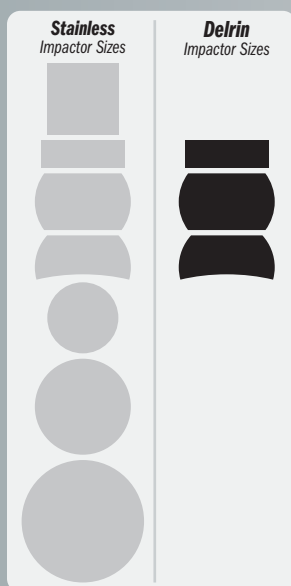

## Modular Impactor Set

*Makes multiple impactor heads easily visible and available*

Designed to have available to the operating surgeon multiple types of impactors utilizing one handle. The rack uses less space and allows the surgeon to quickly see the designs available. The impactors are supplied with stainless steel tips for bone and delrin tips which can be used against an implant for slight placement adjustments.



PRODUCT NO:	
<b>5370</b>	[Complete Set]
<i>Set Includes / Available Individually:</i>	
<b>5370-01</b>	[Rectangular Tip 11 mm x 4 mm Steel]
<b>5370-02</b>	[Oval Tip 13 mm x 8 mm Steel]
<b>5370-03</b>	[Crescent Tip 12 mm x 5 mm Steel]
<b>5370-04</b>	[Square Tip 9 mm x 9 mm Steel]
<b>5370-05</b>	[Round Tip 15 mm Steel]
<b>5370-06</b>	[Round Tip 12 mm Steel]
<b>5370-07</b>	[Round Tip 9 mm Steel]
<b>5370-19</b>	[Set Base] Base Diameter: 3.5" (8,9 cm)
<b>5370-D1</b>	[Rectangular Tip 11 mm 4 mm Delrin]
<b>5370-D2</b>	[Oval Tip 13 mm x 8 mm Delrin]
<b>5370-D3</b>	[Crescent Tip 12 mm x 5 mm Delrin]
<b>5370-H</b>	[Modular Handle]
Overall Length: 8" (20,3 cm)	
Grip Length: 4.5" (11,4 cm)	



Ortho  
Impactors




PRODUCT NO'S:	
Overall Length: 9" (22,9 cm)	
Shaft Diameter: 9 mm	
<b>5331</b>	[11 x 4 mm Rectangle]
<b>5332</b>	[12 x 7 mm Rectangle]
<b>5333</b>	[12 mm Tapered]
<b>5334</b>	[9 mm Square]
<b>5335</b>	[15 mm Round]
<b>5336</b>	[12 mm Round]
<b>5337</b>	[9 mm Round]

PRODUCT NO'S:	
<b>5310</b>	[Round]
Head Diameter: 12,5 mm	
Overall Length: 9.5" (24,1 cm)	
Handle Length: 4.25" (10,5 cm)	
<b>5320</b>	[Square]
Head Dimensions: 10 mm x 10 mm	
Overall Length: 9.5" (24,1 cm)	
Handle Length: 4.25" (10,5 cm)	
<b>5325</b>	[Square with Delrin Tip]
Head Dimensions: 10 mm x 10 mm	
Overall Length: 9.5" (24,1 cm)	
Handle Length: 4.25" (10,5 cm)	
<b>5330</b>	[Rectangular]
Head Dimensions: 10 mm x 3 mm	
Overall Length: 9.5" (24,1 cm)	
Handle Length: 4.25" (10,5 cm)	

## Bone Graft Impactors

*Tap bone graft or bone parts into place with minimal bone trauma*

Designed with serrated, stainless steel tips and available in three shapes: round, square and rectangular.



## Faillace Bone Impact/Graft Forceps

Design modification by John J. Faillace, MD, FAOS

*Long vertical grooves at the tip are designed to deliver graft into a small space, where a freer elevator can be used to push the graft down into the space, then the closed flat end can be used to tamp down the graft*



PRODUCT NO:	
<b>5011</b>	
Overall Length: 5" (12,7 cm)	
Tip Diameter When Closed: 3,2 mm	

## Ortho Mini Gouges



Mini orthopedic gouges with ergonomic handles, designed for bone resection in small areas and resection of periosteum

2 mm Gouge #1168-2  
3 mm Gouge #1168-3  
4 mm Gouge #1168-4  
5 mm Gouge #1168-5  
6 mm Gouge #1168-6  
7 mm Gouge #1168-7  
8 mm Gouge #1168-8

### PRODUCT NO'S:

**1168-2** [2 mm Gouge]  
Overall Length: 5.75" (14,6 cm)  
Gouge Width: 2 mm

**1168-3** [3 mm Gouge]  
Overall Length: 5.75" (14,6 cm)  
Gouge Width: 3 mm

**1168-4** [4 mm Gouge]  
Overall Length: 5.75" (14,6 cm)  
Gouge Width: 4 mm

**1168-5** [5 mm Gouge]  
Overall Length: 5.75" (14,6 cm)  
Gouge Width: 5 mm

MADE EXCLUSIVELY  
FOR INNOMED IN  
GERMANY

**1168-6** [6 mm Gouge]  
Overall Length: 5.75" (14,6 cm)  
Gouge Width: 6 mm

**1168-7** [7 mm Gouge]  
Overall Length: 5.75" (14,6 cm)  
Gouge Width: 7 mm

**1168-8** [8 mm Gouge]  
Overall Length: 5.75" (14,6 cm)  
Gouge Width: 8 mm

## Ortho Mini Chisels



Mini orthopedic chisels, straight and offset, with straight and ergonomic handles

1 mm Offset Chisel #1169-1  
2 mm Offset Chisel #1169-2  
3 mm Offset Chisel #1169-3  
4 mm Offset Chisel #1169-4  
5 mm Offset Chisel #1169-5

3 mm Straight Chisel #1170-3  
4 mm Straight Chisel #1170-4  
5 mm Straight Chisel #1170-5

### PRODUCT NO'S:

#### Offset Chisels

**1169-1** [1 mm Offset Chisel]  
Overall Length: 6.25" (15,9 cm)  
Chisel Width: 1 mm

**1169-2** [2 mm Offset Chisel]  
Overall Length: 6.25" (15,9 cm)  
Chisel Width: 2 mm

**1169-3** [3 mm Offset Chisel]  
Overall Length: 6.25" (15,9 cm)  
Chisel Width: 3 mm

**1169-4** [4 mm Offset Chisel]  
Overall Length: 6.25" (15,9 cm)  
Chisel Width: 4 mm

**1169-5** [5 mm Offset Chisel]  
Overall Length: 6.25" (15,9 cm)  
Chisel Width: 5 mm

#### Straight Chisels

**1170-3** [3 mm Straight Chisel]  
Overall Length: 6.4" (16,3 cm)  
Chisel Width: 3 mm

**1170-4** [4 mm Straight Chisel]  
Overall Length: 6.4" (16,3 cm)  
Gouge Width: 4 mm

**1170-5** [5 mm Straight Chisel]  
Overall Length: 6.4" (16,3 cm)  
Gouge Width: 5 mm

MADE EXCLUSIVELY  
FOR INNOMED IN  
GERMANY



## Ring Curettes



### PRODUCT NO'S:

**Straight Shaft**  
Overall Length: 8.75" (22,2 cm)

**5150** [3 mm, Straight]  
Ring Diameter: 3 mm

MADE FOR INNOMED IN  
GERMANY

**5152** [6 mm, Straight]  
Ring Diameter: 6 mm

**5154** [8 mm, Straight]  
Ring Diameter: 8 mm

### PRODUCT NO'S:

**Bent Shaft**  
Overall Length: 8.625" (21,9 cm)

**5156** [3 mm, Bent]  
Ring Diameter: 3 mm

MADE FOR INNOMED IN  
GERMANY


**5157** [6 mm, Bent]  
Ring Diameter: 6 mm

**5158** [8 mm, Bent]  
Ring Diameter: 8 mm

## Mini-lexer Osteotomes

Helpful with osteophyte and cement removal

Small, thin osteotomes helpful with osteophyte and cement removal. Larger handle helps with better control.

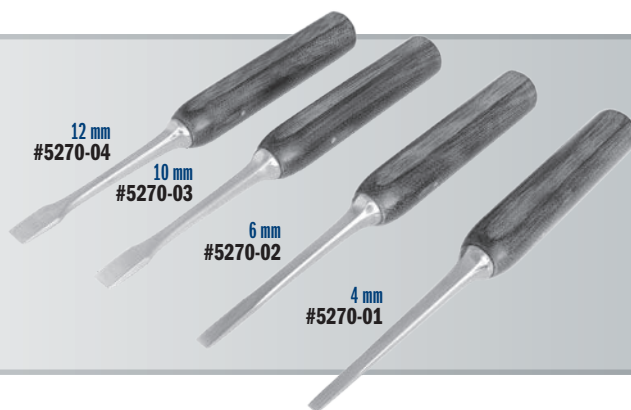

### PRODUCT NO'S:

**5270-01**  
Blade Width: 4 mm  
Overall Length: 7.25" (18,4 cm)  
Handle Length: 4" (10,2 cm)

**5270-02**  
Blade Width: 6 mm  
Overall Length: 7.25" (18,4 cm)  
Handle Length: 4" (10,2 cm)

**5270-03**  
Blade Width: 10 mm  
Overall Length: 7.25" (18,4 cm)  
Handle Length: 4" (10,2 cm)

**5270-04**  
Blade Width: 12 mm  
Overall Length: 7.25" (18,4 cm)  
Handle Length: 4" (10,2 cm)

MADE FOR INNOMED IN  
GERMANY

## Mini-lexer Gouges

### PRODUCT NO'S:

**2022-02** [Mini Lexer Gouge - 4 mm]  
Overall Length: 7" (17,8 cm)  
Gouge Width: 4 mm

**2022-03** [Mini Lexer Gouge - 6 mm]  
Overall Length: 7" (17,8 cm)  
Gouge Width: 6 mm

**2022-04** [Mini Lexer Gouge - 10 mm]  
Overall Length: 7" (17,8 cm)  
Gouge Width: 10 mm

MADE FOR INNOMED IN  
GERMANY

**New!**

4 mm Gouge #2022-02

6 mm Gouge #2022-03

10 mm Gouge #2022-04



Can be used to help remove bone from around screw heads or broken screws



## Universal Bone Grafting /Impacting Forceps

Designed by J. A. Amis, MD

*Bone graft can be grasped, placed & impacted without changing hands or instruments*

### PRODUCT NO'S:

**Short: 6" (15,2 cm) Length**

**5010-01** 1/8" (3,2 mm) Diameter End

**5010-02** 3/16" (4,8 mm) Diameter End

**5010-03** 1/4" (6,3 mm) Diameter End

**5010-04** 5/16" (8 mm) Diameter End

**Long: 10" (25,4 cm) Length**

**5050-01** 1/8" (3,2 mm) Diameter End

**5050-03** 3/16" (4,8 mm) Diameter End

**5050-04** 1/4" (6,3 mm) Diameter End

**5050-04** 5/16" (8 mm) Diameter End

The forceps are designed with grasping ends for delivery of bone graft. When the graft is in place, the forceps are closed, which forms the ends into an impacting punch. A striking platform is attached to the end of the forceps for tapping and tamping the graft. Four end diameters are available in two lengths.

Long 10" with 1/8" (3,2 mm) Diameter End **#5050-01**  
Long 10" with 3/16" (4,8 mm) Diameter End **#5050-02**  
Long 10" with 1/4" (6,3 mm) Diameter End **#5050-03**  
Long 10" with 5/16" (8 mm) Diameter End **#5050-04**

Short 6" with 1/8" (3,2 mm) Diameter End **#5010-01**  
Short 6" with 3/16" (4,8 mm) Diameter End **#5010-02**  
Short 6" with 1/4" (6,3 mm) Diameter End **#5010-03**  
Short 6" with 5/16" (8 mm) Diameter End **#5010-04**

1/8"  
(3,2 mm)

3/16"  
(4,8 mm)


1/4"  
(6,3 mm)

5/16"  
(8 mm)

Diameter ends  
at actual size  
(closed forceps)

*When the forceps are closed, they form into an impacting punch*

MADE EXCLUSIVELY  
FOR INNOVIMED IN  
GERMANY

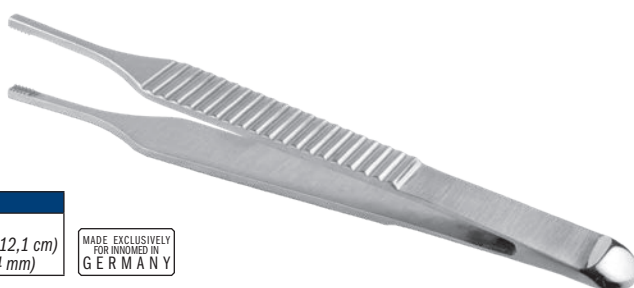

### PRODUCT NO:

**1166**

Overall Length: 4.75" (12,1 cm)

Tip Width: 2.4 mm (2,4 mm)

MADE EXCLUSIVELY  
FOR INNOVIMED IN  
GERMANY

## Adson Forceps with Cobb Elevator End

Designed by Oscar Castro-Aragon, MD

*Has the advantages of having a Cobb tip at the end of an Adson forceps*

Allows the opportunity to do soft tissue dissection, cleaning of the bone or bone fragments in a fracture, push bone fragments to hold a reduction in a fracture, separate soft tissue, and turn it around to pick up tissue without having to switch instruments back and forth.

## Charnley Type Tissue Needle Forceps

Designed by Amal Das Jr., MD

*Helpful for wound closure in deep areas with fascia under tension such as hip or knee replacement*

Can also help retrieve a needle in a tight area.




MADE EXCLUSIVELY  
FOR INNOVIMED IN  
GERMANY

### PRODUCT NO:

**1165**

Overall Length: 6.875" (17,5 cm)




### PRODUCT NO:

**2017**

Overall Length: 4.875" (12,4 cm)

MADE EXCLUSIVELY  
FOR INNOVIMED IN  
GERMANY

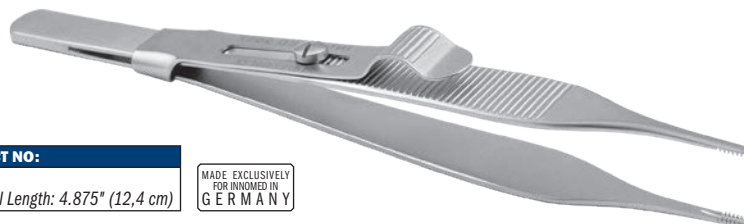

## Rudisill Locking Small Bone Reduction Forcep

Designed by Ed Rudisill, MD

*For reduction of hand phalanx and metacarpal fractures*

## Long Bonney Tissue Forceps


*Extra length—3" more than standard—allows for use in deep wound areas*

### PRODUCT NO:

**5040**

Overall Length: 10" (25,4 cm)

MADE EXCLUSIVELY  
FOR INNOVIMED IN  
GERMANY

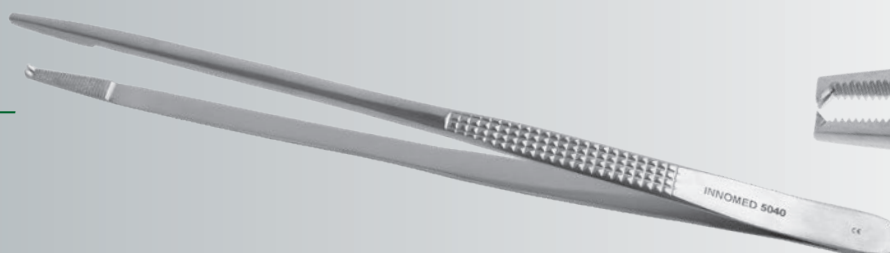



## Cobb Elevators

### Two Sizes Available With or Without Teeth

Ultra hard titanium nitride coating helps to extend blade life by increasing surface hardness, prolonging sharpness, and resisting chemicals and corrosion.

PRODUCT NO'S:	
WITH TEETH	WITHOUT TEETH
<b>3432</b> [1/2" with Teeth] Overall Length: 11" (27,9 cm) Blade Width: 1/2" (13 mm)	<b>3436</b> [1/2" without Teeth] Overall Length: 11" (27,9 cm) Blade Width: 1/2" (13 mm)
<b>3434</b> [1" with Teeth] Overall Length: 11" (27,9 cm) Blade Width: 1" (25,4 mm)	<b>3438</b> [1" without Teeth] Overall Length: 11" (27,9 cm) Blade Width: 1" (25,4 mm)



## Bradley Periosteal Elevator

Designed by Gary W. Bradley, MD

PRODUCT NO'S:	
<b>4719</b> [1/2"] Overall Length: 11" (27,9 cm) Blade Width: .5" (13 mm)	
<b>4720</b> [3/4"] Overall Length: 11" (27,9 cm) Blade Width: .75" (19 mm)	



## Periosteal Elevator

### Designed for better control

Designed with sharper sides for ease of elevating and stripping. The handle is designed for better control.



PRODUCT NO'S:	
<b>3450</b> [Angled Shaft with Straight Blade End] Overall Length: 7.75" (19,7 cm) Handle Length: 4.5" (11,4 cm) Blade Size: 19 x 14 mm	
<b>3455</b> [Straight Shaft with Rounded Blade End] Overall Length: 7.5" (19,1 cm) Handle Length: 4.5" (11,4 cm) Blade Size: 16 x 13 mm	



## Gray Syringe Assist with Ergonomic Handle

Designed by Robert Gray, MD

For use in the O.R or the office, the design helps to prevent hand fatigue and pain when injecting with a 20mL syringe over multiple cases

- Sterilizable for O.R use, such as injecting the posterior capsule during TKA
- Especially useful for injecting preoperative local anesthesia for WALANT surgery
- Uses finger flexors to generate more force over more surface area than only the thumb flexor
- Ratchet mechanism ensures maximal grip force generation throughout entire injection



Syringe not included.

PRODUCT NO:	
<b>8988</b>	
Overall Length - Closed: 5.25" (13,3 cm)	
Overall Length - Open: 7.5" (19,1 cm)	
Height: 5" (12,7 cm)	
Syringe Diameter: 21 mm	



Patent Pending



## White Aspiration Handle

Designed by Edward White, MD

Designed for aspiration of cavities or spaces that have greater than 20 ml volume, such as joints, bone marrow, and the illiac crest

Works with a 60 ml syringe (not included) only.

Syringe not included.

PRODUCT NO:	
<b>1131</b>	
Height: 5" (12,7 cm)	
Length: 6.5" (16,5 cm) / Extends to 11" (27,9 cm)	
Width at Syringe Holder: 1.5" (3,8 cm)	
Body Width: .9" (2,3 cm)	





## Ortho Suction Tube

Designed by T. Eickmann, MD


*Very effective for suction and minor retracting*

Helps eliminate plugging due to bone, cement fragments, blood clots, etc.

### PRODUCT NO:

**5465**

Overall Length: 9.25" (23,5 cm)  
End Hole Dia.: 1 mm  
Side Hole Dia.: 1.5 mm

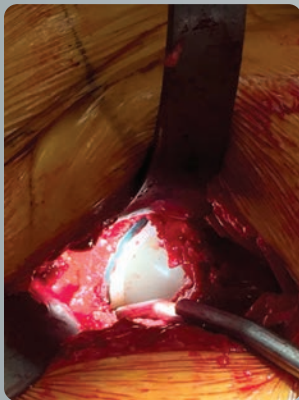

## Lighted Yankaur Suction Device

Designed by Adolph V. Lombardi Jr., MD

*Designed to help provide effective suction with the addition of a light source for enhanced visualization*

- ▶ Can be attached to a fiber optic light cable with ACMI (female) connector
- ▶ Entire device is steam sterilizable
- ▶ The handle is made of Delrin

Light

Suction




### PRODUCT NO:

**8016-L**

Overall Length: 11.75" (29,8 cm)  
Handle Length: 3.93" (10 cm)  
Handle Width: .86" (2,2 cm)  
Suction Tube Diameter: .25" (6,35 mm)

Delrin Handle

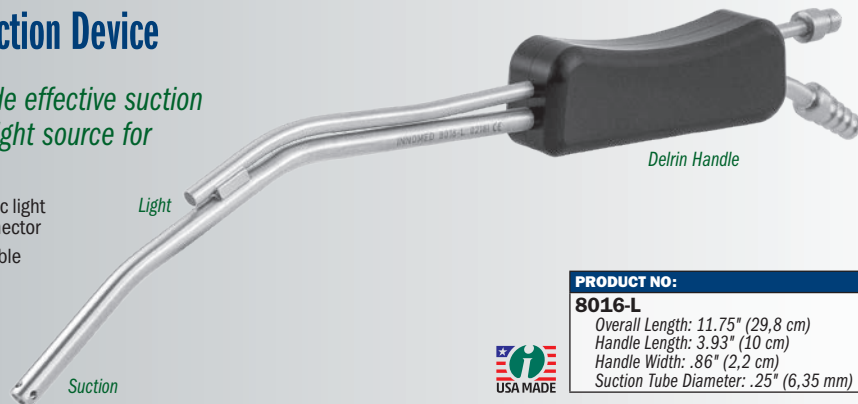

## Beicker Curette Suction Device

Designed by Clint Beicker, MD

*Designed to help visualization of a fracture site within a fracture hematoma*

Also useful for arthroscopic curettage of osteochondral lesions.



### PRODUCT NO:

**4231**

Overall Length: 10.5" (26,7 cm)  
Curette Cup: 7.5 mm x 5.5 mm



*Designed to be used during exposure of the posterior spine, as well as for pelvic and acetabular trauma cases*



## Gelbke Cobb Elevator with Suction

Designed by Martin K. Gelbke, MD



### PRODUCT NO:

**3433**

Overall Length: 12.75" (32,4 cm)  
Cobb End Width: 18 mm (.7")  
Shaft plus Head Length: 5.5" (15 cm)

## Reusable Light Wand

*Designed for illumination of deep incisions*




Can be attached to a fiber optic light cable with ACMI (female) connector.



### PRODUCT NO:

**8010-02**

Overall Length: 13.5" (34,3 cm)  
Handle Length: 5.55" (13,3 cm)  
Bend Angle: 45°

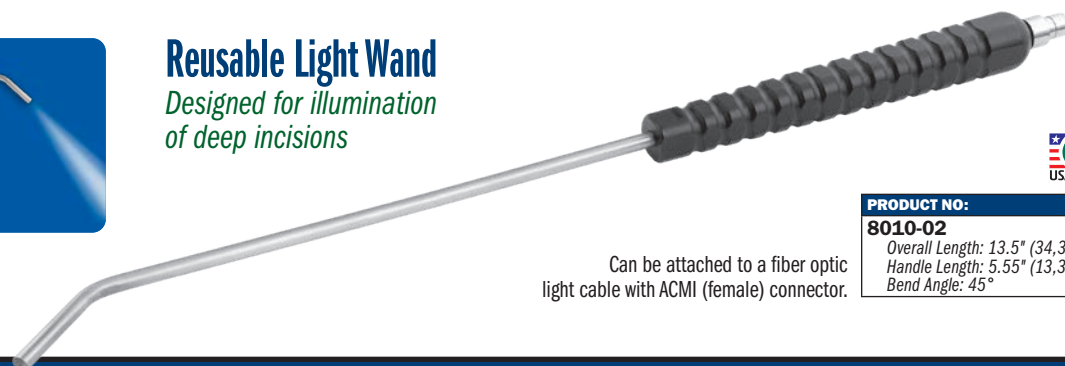



103 Estus Drive  
Savannah, GA 31404


PRSR.T. STD.  
U.S. POSTAGE  
**PAID**  
BOURBON, IN  
PERMIT NO. 29

# FREE TRIAL

## on most instruments

Instruments are available for a no-charge two-week evaluation – includes FREE UPS Ground Shipping\*

\*When shipped to a hospital or medical center; additional charge applies for expedited shipping.  
Free trial offer excludes implant extraction instruments, which are available as rentals. There is a pad replacement charge with the hip positioners.

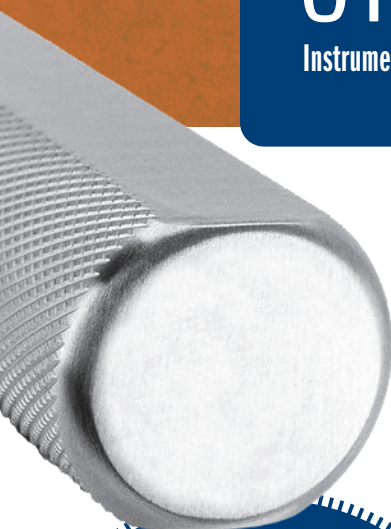

Larger diameter  
handle for better grip,  
and longer

## Ortho Mallets



Standard  
with Flat Sides  
2.25 Lbs.  
#7811

Standard  
2.5 Lbs.  
#7812

PRODUCT NO'S:	
<b>7811</b>	[Standard with Flat Sides]
Overall Length: 7.75" (19,7 cm)	
Handle Length: 4.812 (12,2 cm)	
Head Diameter: 1.5" (3,8 cm)	
Head Weight: 2.25 lb. (1.02 kg)	
<b>7812</b>	[Standard]
Overall Length: 7.75" (19,7 cm)	
Handle Length: 4.812 (12,2 cm)	
Head Diameter: 1.5" (3,8 cm)	
Head Weight: 2.5 lb. (1.13 kg)	



ISO 13485:2016

**INNOMED, INC**  
103 Estus Drive  
Savannah, GA 31404

Tel 912.236.0000  
Fax 912.236.7766

innomed.net  
info@innomed.net

**Innomed-Europe LLC**  
Alte Steinhauserstr. 19  
CH-6330 Cham, Switzerland  
Tel 0041 (0) 41 740 67 74

www.innomed-europe.com  
orders@innomed-europe.com

**Innomed-Europe GmbH**  
c/o Emons Logistik GmbH  
In Rammelswiesen 9  
D-78056 Villingen-Schwenningen, Germany  
Tel 0049 (0) 7720 46110 60

www.innomed-europe.com  
orders@innomed-europe.com

12  
24

© 2024 Innomed, Inc.  
All Rights Reserved

1.800.548.2362



INNOMED.NET